

WAAS CH 40243 W05B	APP CRS 049°	Rwy Idg TDZE Apt Elev	7100 2567 2567
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5
PULLMAN/MOSCOW RGNL (PUW)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1 3/8 SM.
A † RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR




MISSED APPROACH: Climb to 3460 then climbing left turn to 5400 direct PLUUR and hold

#Missed approach requires minimum climb of 250 feet per NM to 4800.

ASOS 135.675	SEATTLE CENTER 123.95 290.55	UNICOM 122.8 (CTAF) 0
-----------------	---------------------------------	--------------------------

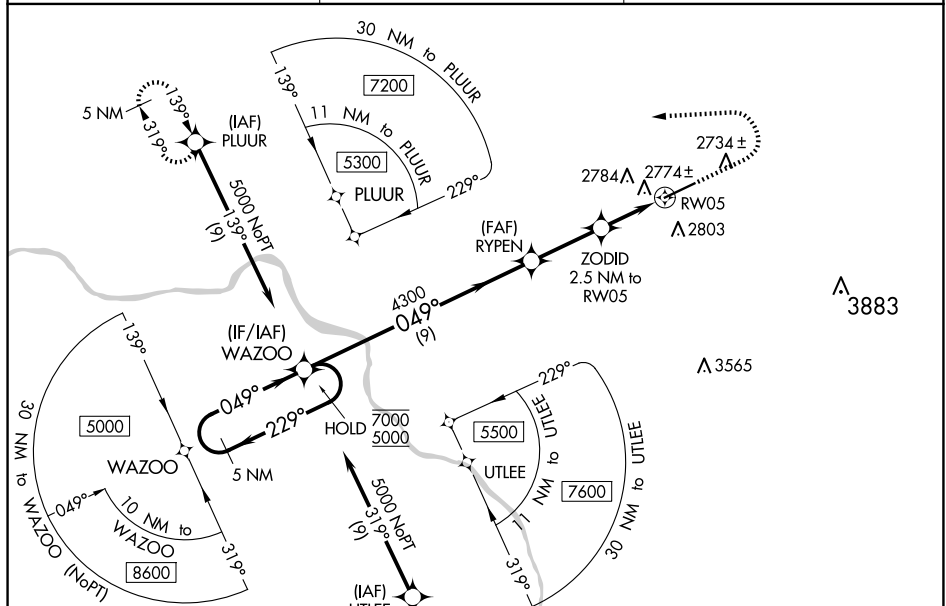

ELEV 2567	D	TDZE 2567
-----------	----------	-----------

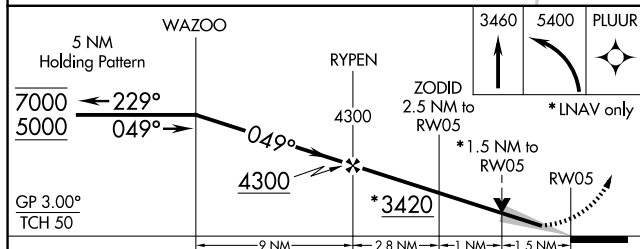

CATEGORY	A	B	C	D
LPV DA#†	2767/24 200 (200-½)			
LPV DA	2846/24 279 (300-½)			
INAV/ VNAV DA	3005/40 438 (500-¾)			
INAV MDA	3080/24 513 (600-½)		3080/55 513 (600-1)	
C CIRCLING	3080-1 513 (600-1)	3120-1 553 (600-1)	3140-1½ 573 (600-1½)	3420-2¾ 853 (900-2¾)

