RNAV (GPS) RWY 35

AVENGER FLD (SWW)

WAAS	APP CRS		
CH **78225**	**346°**	Rwy Idg	**5840**
W35A		TDZE	**2355**
		Apt Elev	**2380**

When VGSI inop, Circling Rwy 17 and 22 NA at night. Baro-VNAV NA when using Snyder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 29°C (84°F). When VGSI inop, Straight-in/Circling Rwy 35 NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Snyder altimeter setting and increase LPV DA to 2677 feet, LNAV/VNAV DA to 2785 feet, and all MDAs 80 feet; increase LNAV/VNAV visibility all Cats ¼ SM, LNAV visibility Cats C and D ⅛ SM, and Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 4400 direct TORYO and hold.

AWOS-3	ABILENE APP CON	UNICOM
119.025	**127.2 282.3**	**122.8** (CTAF)

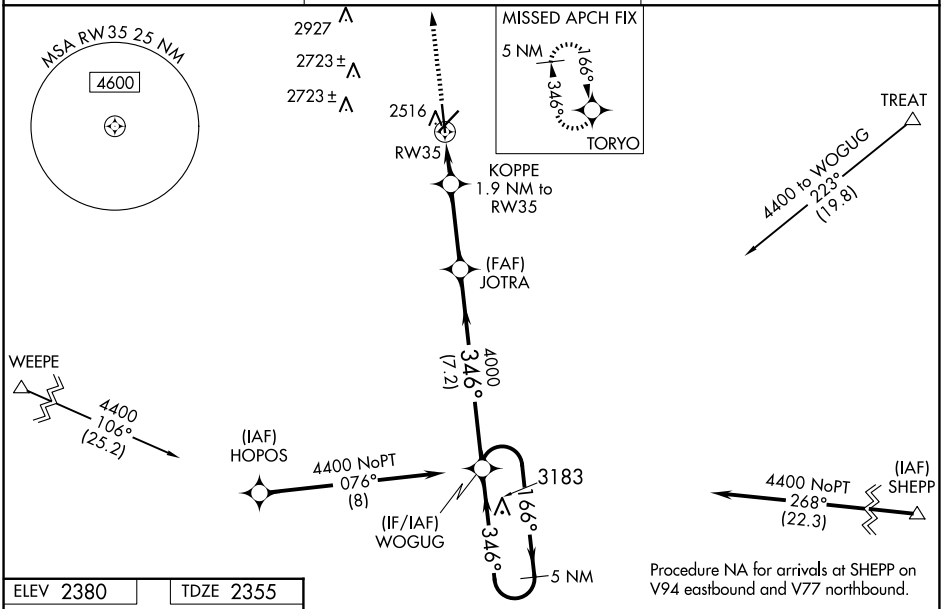

ELEV 2380 TDZE 2355

REIL Rwys 17-35

MIRL Rwys 4-22 and 17-35

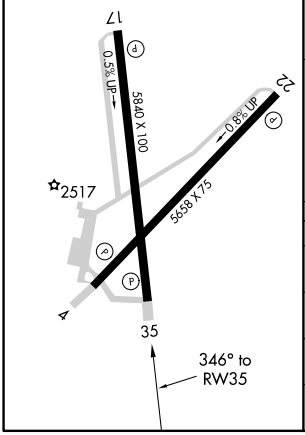

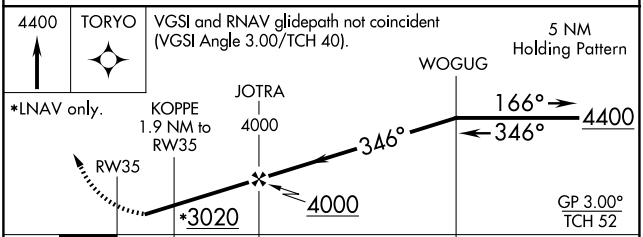

CATEGORY	A	B	C	D
LPV DA	2605-1 250 (300-1)			
LNAV/VNAV DA	2713-1⅛ 358 (400-1⅛)			
LNAV MDA	2820-1 465 (500-1)		2820-1⅜ 465 (500-1⅜)	
CIRCLING	2880-1 500 (500-1)		3080-2 700 (700-2)	3080-2¼ 700 (700-2¼)

SC-2, 10 JUL 2025 to 07 AUG 2025
SC-2, 10 JUL 2025 to 07 AUG 2025