

WAAS CH 45903 W04A	APP CRS 036°	Rwy Idg 8000 TDZE 40 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

RNP APCH.


▼

▲

Rwy 4R helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct BEDDY and hold.

ATIS 134.05	LAFAYETTE APP CON ★ 121.1 363.0	LAFAYETTE TOWER ★ 118.5 (CTAF) 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95
-----------------------	---	--	-------------------------	---------------------------	-------------------------

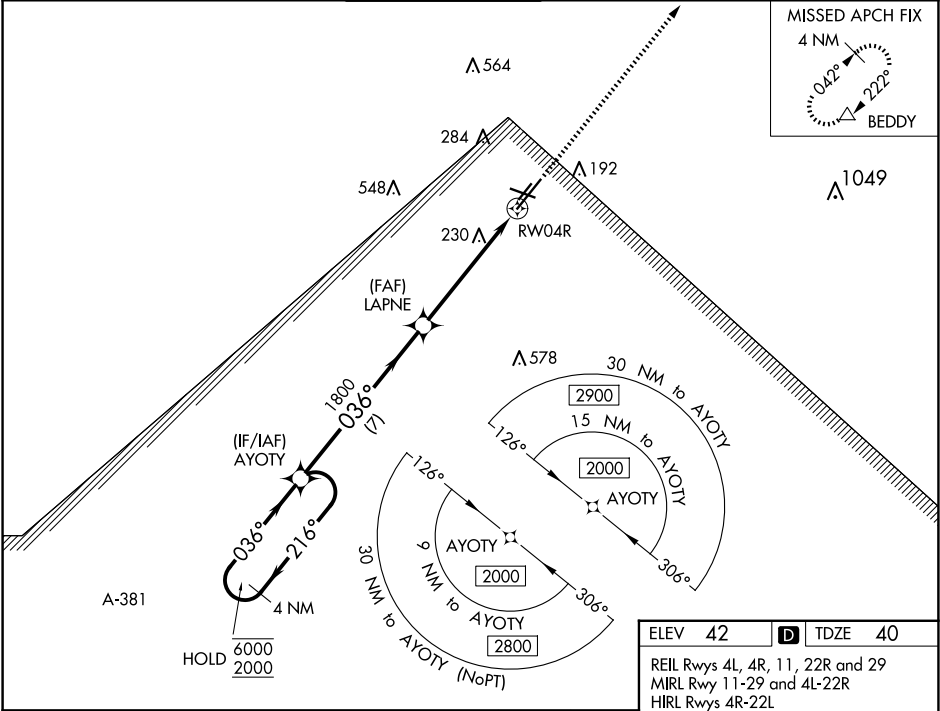

4 NM Holding Pattern		AYOTY		2000 BEDDY	
6000 ← 216°		1800		* 1.3 NM to RW04R	
2000 → 036°		LAPNE		* LNAV only.	
GP 3.00°		1800		RW04R	
TCH 49		7 NM		4.1 NM	
				1.3	
CATEGORY	A	B	C	D	
LPV DA		317-7/8	277 (300-7/8)		
LNAV/VNAV DA		440-1 1/8	400 (400-1 1/8)		
LNAV MDA	500-1	460 (500-1)	500-1 3/8	460 (500-1 3/8)	
CIRCLING	500-1 458 (500-1)	580-1 538 (600-1)	700-1 3/4 658 (700-1 3/4)	700-2 658 (700-2)	

