

LOC/DME I-GAD	APP CRS	Rwy Ldg	6802
108.35	244°	TDZE	560
Chan 20(Y)		Apt Elev	569



ILS or LOC RWY 24

NORTHEAST ALABAMA RGNL (GAD)

▼ DME required. VDP NA when using Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT	BIRMINGHAM APP CON	CLNC DEL	UNICOM
127.825	125.45 279.65	120.05 257.7	122.725 (CTAF) 0

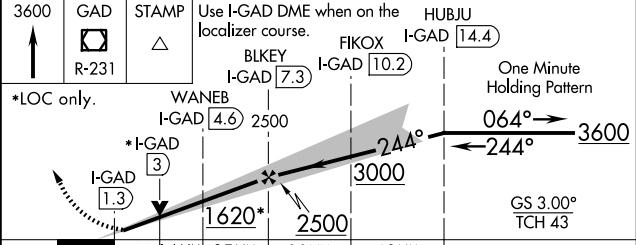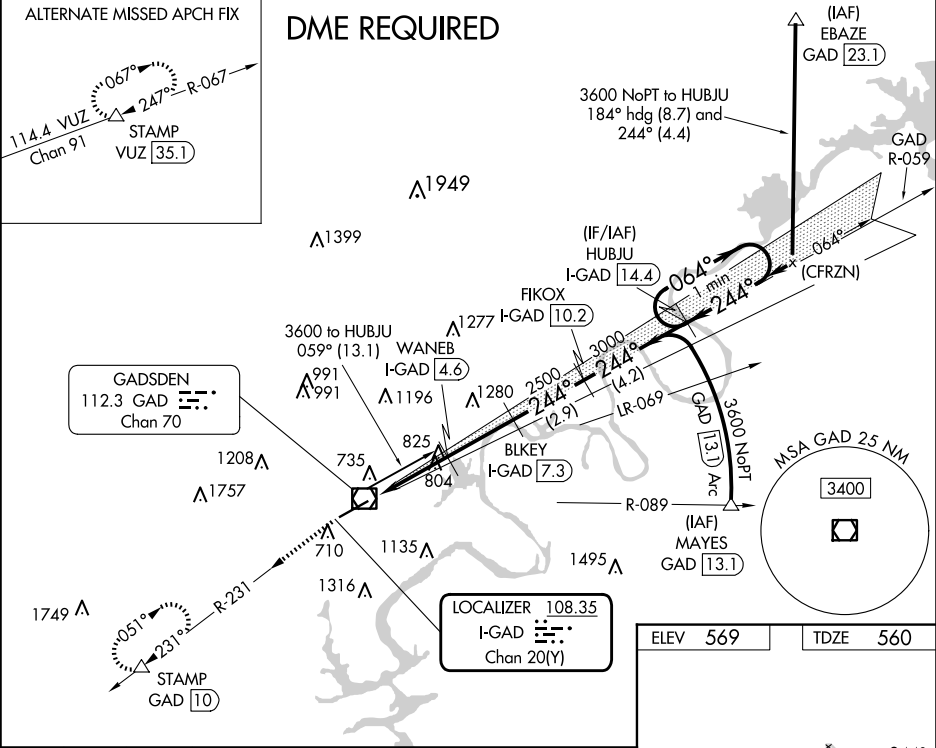

CATEGORY	A	B	C	D
S-ILS 24		779-¾	219 (300-¾)	
S-LOC 24	1140-1	580 (600-1)	1140-1¾	580 (600-1¾)
CIRCLING	1140-1	571 (600-1)	1440-2½ 871 (900-2½)	1680-3 1111 (1200-3)

