

LOC I-MSS <b><u>108.7</u></b>	APP CRS <b>045°</b>	Rwy Idg <b>5601</b> TDZE <b>205</b> Apt Elev <b>221</b>
----------------------------------	------------------------	---

## ILS or LOC RWY 5



MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.

**T** Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use Potsdam altimeter setting and increase DA to 528 feet and all visibilities  $\frac{1}{4}$  SM; increase all MDAs 80 feet, visibility Cat C and D  $\frac{1}{8}$  SM and Circling visibility Cat C and Cat D  $\frac{1}{4}$  SM.

**MISSED APPROACH:**  
Climb to 1200 then  
climbing left turn to  
2300 direct MISSE  
LOM and hold.

ASOS <b>128,075</b>	BOSTON CENTER <b>135.25 377.1</b>	UNICOM <b>123.0 (CTAF) 0</b>
------------------------	--------------------------------------	---------------------------------

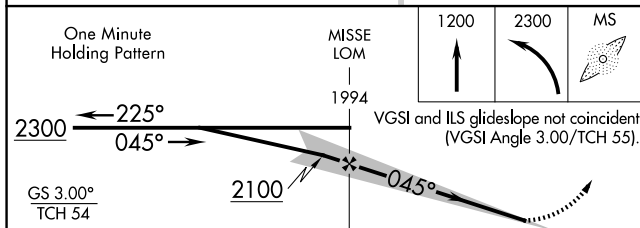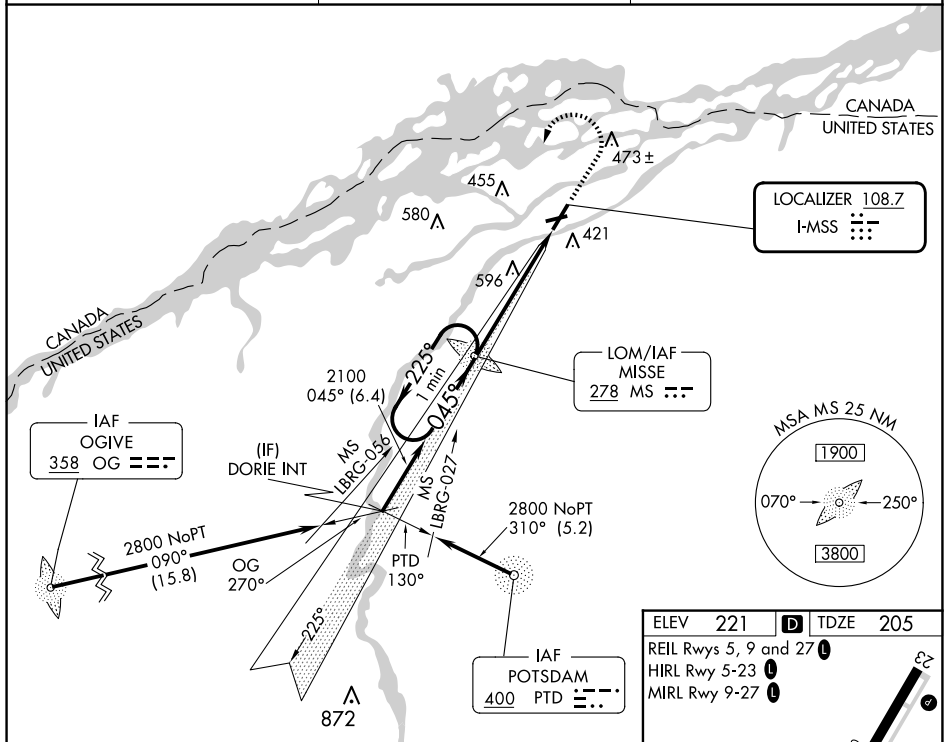

		5.4 NM		
CATEGORY	A	B	C	D
S-ILS 5	455-3/4 250 (300-3/4)			
S-LOC 5	800-1	595 (600-1)	800-13/4	595 (600-13/4)
CIRCLING	800-1	579 (600-1)	880-13/4 659 (700-13/4)	900-2 1/4 679 (700-2 1/4)

