
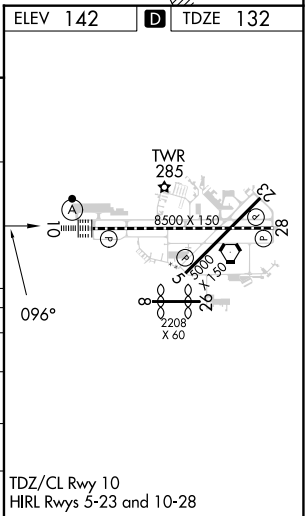
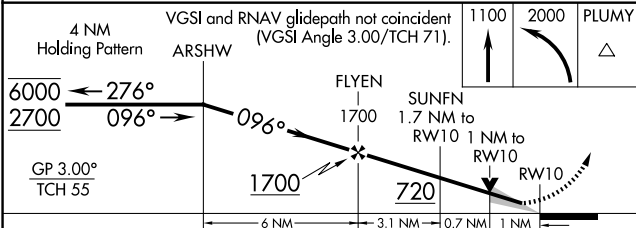


WAAS CH <b>78305</b> <b>W10A</b>	APP CRS <b>096°</b>	Rwy Idg TDZE <b>132</b> Apt Elev <b>142</b>
----------------------------------------	------------------------	---------------------------------------------------

RNAV (GPS) RWY 10  
LAKELAND LINDER INTL (LAL)

RNP APCH-GPS. ⚠ Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.	ALS-F-2 ⚠	MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct PLUMY and hold.
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------	---------------------------------------------------------------------------------------

ATIS <b>118.025</b>	TAMPA APP CON <b>120.65 290.3</b>	LAKELAND TOWER <b>124.5 236.775</b>	GND CON <b>121.4</b>
------------------------	--------------------------------------	----------------------------------------	-------------------------

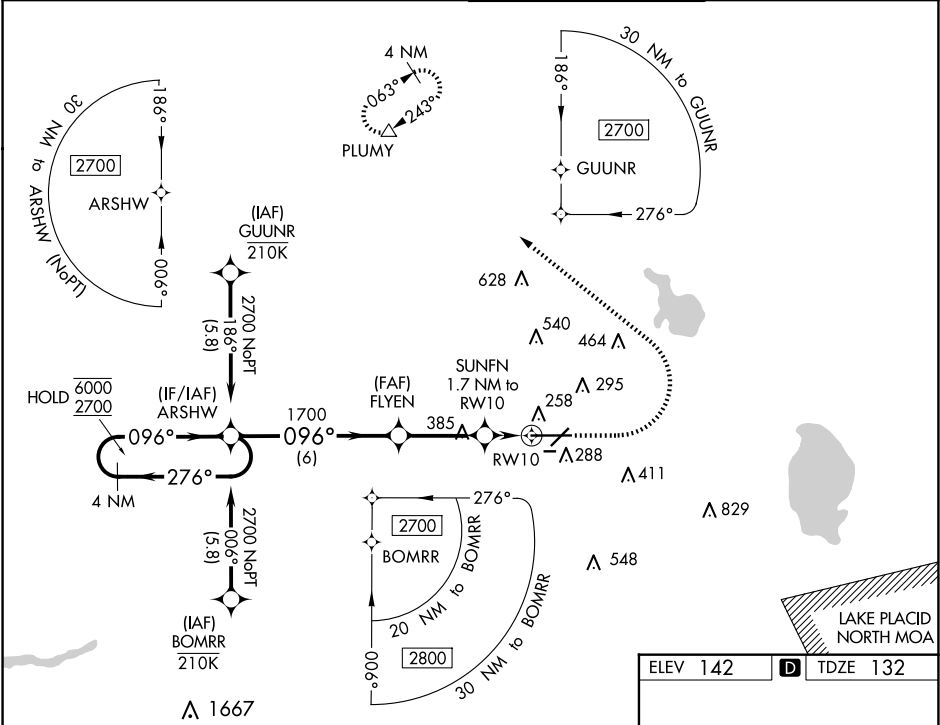

CATEGORY	A	B	C	D
LPV DA		332/18	200 (200-½)	
LNAV/VNAV DA		439/24	307 (300-½)	
LNAV MDA	520/24	388 (400-½)	520/35	388 (400-¾)
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	720-1½ 578 (600-1½)	840-2¼ 698 (700-2¼)