


| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Idg | 6006 |
| 058° | TDZE | 186 |
| | Apt Elev | 212 |


RNAV (RNP) Y RWY 6

TRENTON MERCER (TTN)


| | | |
|--|--|---|
| <p>T For uncompensated Baro-VNAV systems, procedure NA below -13°C (8°F) or above 54°C (130°F). GPS required. For inoperative MALSR, increase RNP 0.10 DA all Cats visibility to 1 mile, increase RNP 0.30 DA all Cats visibility to 1½ mile.</p> | <p>MALSR</p>  | <p>MISSED APPROACH: Climb to 2600 direct BIRKE and hold.</p> |
|--|--|---|

| | | | | | |
|-----------------|-------------------------------------|---|------------------------|-------------------------|------------------|
| ATIS 126.775 | PHILADELPHIA APP CON 123.8 291.7 | TRENTON TOWER * 120.7 (CTAF) 0 257.8 | GND CON 121.9 257.8 | CLNC DEL 121.9 257.8 | UNICOM 122.95 |
|-----------------|-------------------------------------|---|------------------------|-------------------------|------------------|

RADAR REQUIRED

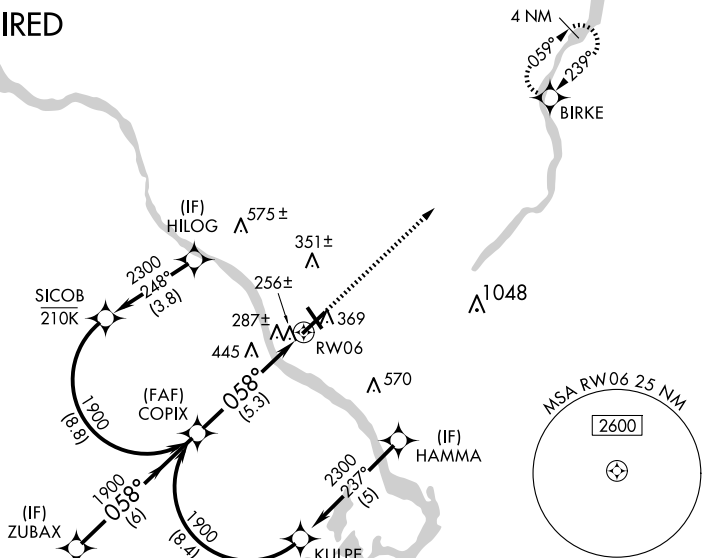


| | | |
|----------|----------|----------|
| ELEV 212 | D | TDZE 186 |
|----------|----------|----------|

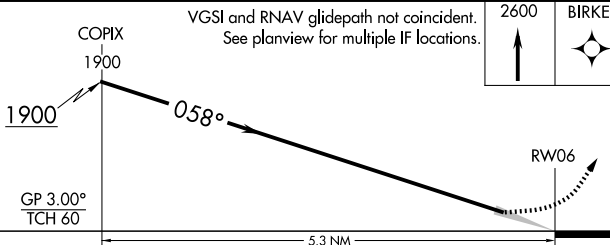

| CATEGORY | A | B | C | D |
|-------------|---|---------------------|----------------------------|---|
| RNP 0.10 DA | | 510- $\frac{1}{2}$ | 324 (300- $\frac{1}{2}$) | |
| RNP 0.30 DA | | 668-1 $\frac{1}{8}$ | 482 (500-1 $\frac{1}{8}$) | |

AUTHORIZATION REQUIRED

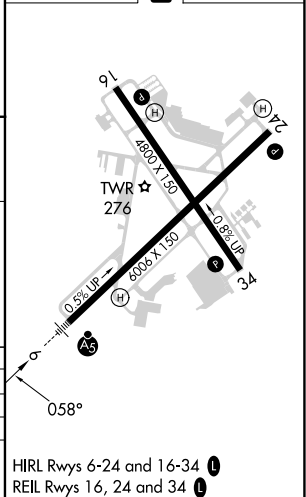

RNAV (RNP) Y RWY 6