RNAV (GPS) RWY 34

BEVERLY RGNL (BVY)

WAAS	APP CRS	Rwy Idg	5001
CH 97631	337°	TDZE	102
W34A		Apt Elev	107

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Lawrence altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lawrence altimeter setting: increase LPV DA to 416 and LNAV/VNAV DA to 502 and all MDA 40 feet; increase LPV all Cats visibility and LNAV/VNAV all Cats visibility and LNAV Cats C and D visibility ⅛ SM and Circling Cats C and D visibility ¼ SM. Circling Rwy 9 NA at night. Rwy 34 helicopter visibility reduction below ¾ SM NA. Rwy 9 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000 direct HOMUX and on track 045° to WAKBI and hold.

ATIS	BOSTON APP CON	BEVERLY TOWER★	GND CON	UNICOM
119.2	124.4 279.6	125.2 (CTAF) L	121.6	122.95

RADAR REQUIRED

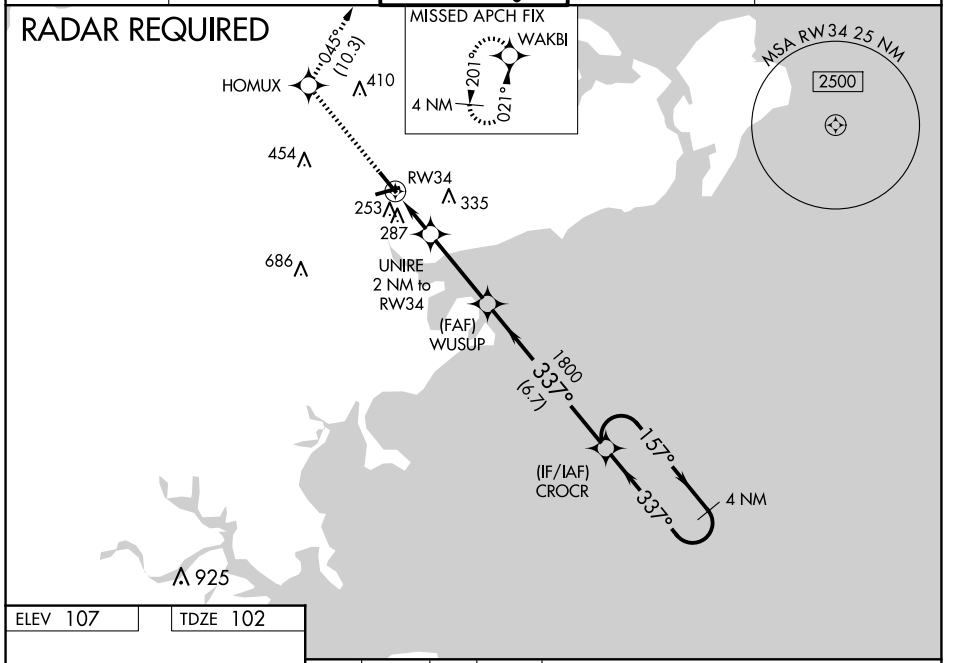

ELEV 107	TDZE 102



REIL Rwy 34 L
MIRL Rwy 9-27 and 16-34 L

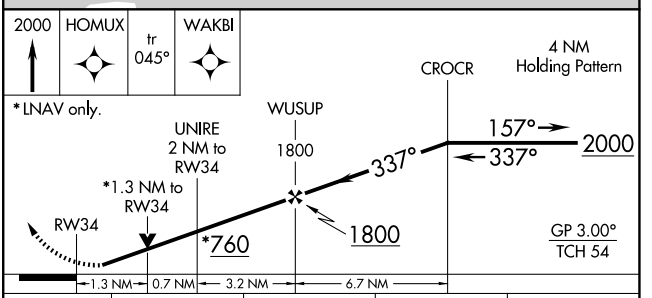

CATEGORY	A	B	C	D
LPV DA	382-1	280 (300-1)		
LNAV/VNAV DA	468-1¼	366 (400-1¼)		
LNAV MDA	540-1	438 (500-1)	540-1¼	438 (500-1¼)
C CIRCLING	600-1	493 (500-1)	820-2	880-2½
			713 (800-2)	773 (800-2½)

NE-1, 10 JUL 2025 to 07 AUG 2025
NE-1, 10 JUL 2025 to 07 AUG 2025