

WAAS CH <b>48941</b> <b>W35A</b>	APP CRS <b>347°</b>	Rwy Idg <b>8002</b> TDZE <b>2141</b> Apt Elev <b>2164</b>
--	------------------------	---

# RNAV (GPS) RWY 35

## ASHEVILLE RGNL (AVL)

RNP APCH.

↓  
A


Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1 $\frac{3}{8}$  SM.

MALSR



**MISSED APPROACH:** Climb to 6800 direct ONZIQ and hold, continue climb-in-hold to 6800.

ATIS <b>120.2</b>	ASHEVILLE APP CON★ <b>124.65 351.8</b>	ASHEVILLE TOWER★ <b>121.1 (CTAF) 0 257.8</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
----------------------	---	---	-------------------------	-------------------------

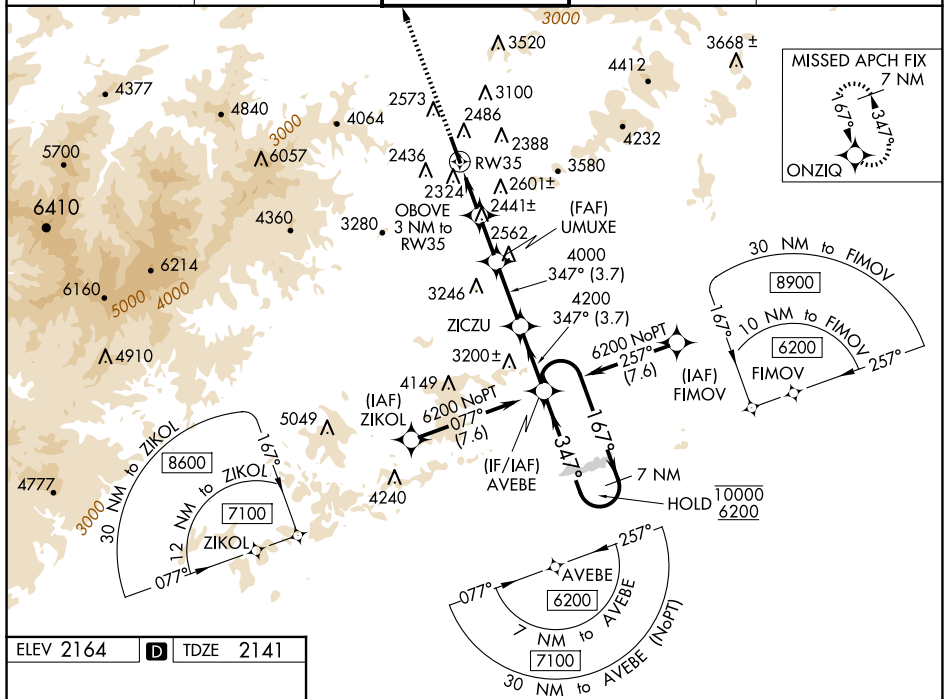

ELEV 2164	<b>D</b>	TDZE 2141
-----------	----------	-----------

