

WAAS CH <b>63020</b> <b>W15A</b>	APP CRS <b>148°</b>	Rwy Idg TDZE Apt Elev	<b>4107</b> <b>745</b> <b>745</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15L

LAWRENCE J TIMMERMAN (MWC)

RNP APCH.



▼

⚠

Circling NA to Rwy 4R, 15R, 22L and 33L. Rwy 15L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using General Mitchell Intl altimeter setting. When local altimeter setting not received, use General Mitchell Intl altimeter setting and increase LPV DA to 1024 feet and LNAV/VNAV DA to 1251 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ½ SM.

MISSED APPROACH:  
Climb to 1300 then climbing right turn to 3000 direct HAWKN and hold.

ATIS <b>128.3</b>	MILWAUKEE APP CON <b>125.35 307.0</b>	TIMMERMAN TOWER ★ <b>120.5 (CTAF) 0</b>	GND CON <b>121.7</b>	CLNC DEL <b>121.7 (When twr closed)</b>	UNICOM <b>122.95</b>
----------------------	--	--	-------------------------	--	-------------------------

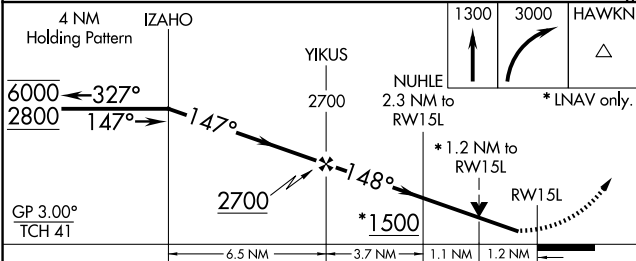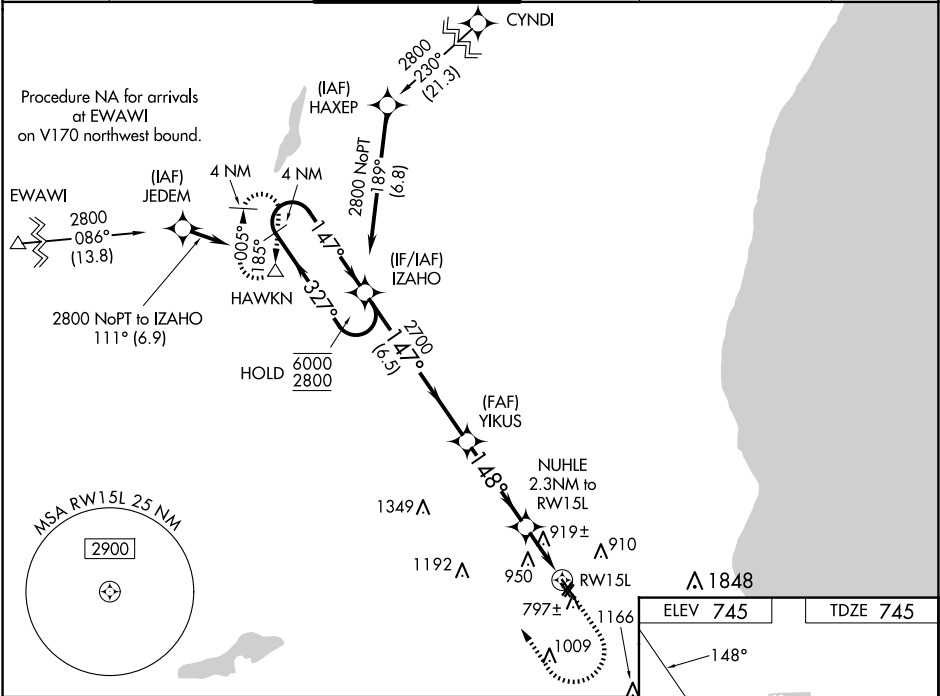

CATEGORY	A	B	C	D
LPV DA		995-1	250 (300-1)	
LNAV/VNAV DA		1222-1½	477 (500-1½)	
LNAV MDA	1180-1	435 (500-1)	1180-1¼	435 (500-1¼)
CIRCLING	1220-1 475 (500-1)	1340-1 595 (600-1)	1360-1¾ 615 (700-1¾)	1560-2¾ 815 (900-2¾)

