


D-ATIS 134.85  
CLNC DEL 135.7 317.8  
CPDLC  
GND CON  
121.9 317.8 (EAST)  
121.625 348.6 (WEST)  
DULLES TOWER  
120.1 317.8 (Rwy 1R/19L)  
120.25 348.6 (Rwy 1C/19C)  
134.425 348.6 (Rwys 1L/19R, 12/30)  
POTOMAC DEP CON  
125.05 350.2

TOP ALTITUDE:  
3000


TAKEOFF MINIMUMS:  
Rwys 1C, 1L, 1R, 19L,  
19C, 19R, 30: Standard  
with minimum climb of  
500' per NM to 820.

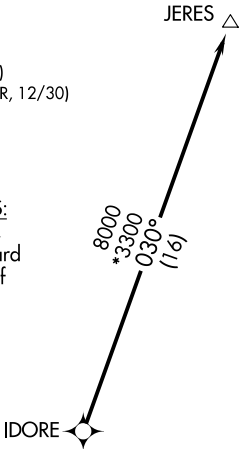

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1C/1L/1R: Climb heading 011° to 820, then on heading 011° or as assigned by ATC, expect RADAR vectors to IDORE, thence....  
TAKEOFF RUNWAY 19L/19C/19R: Climb heading 191° to 820, then right turn heading 320° or as assigned by ATC, expect RADAR vectors to IDORE, thence....  
TAKEOFF RUNWAY 30: Climb heading 301° to 820, then on heading 320° or as assigned by ATC, expect RADAR vectors to IDORE, thence....

.... on track 030° to JERES, maintain 3000 or as directed by ATC. Expect clearance to filed altitude within ten (10) minutes after departure.

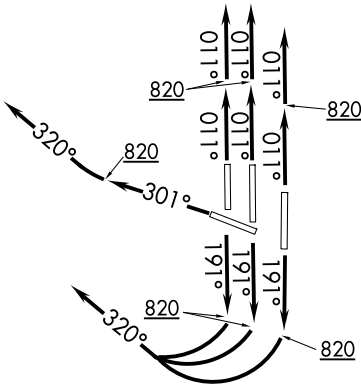

NOTE: RNAV 1.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RADAR required.  
NOTE: Turbojets only.

NOTE: Chart not to scale.