

WAAS CH 78104 W27A	APP CRS 264°	Rwy Ldg TDZE 843 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 27R

GRAND FORKS INTL (GFK)

RNP APCH - GPS.



▼

▲

Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1104 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 1178 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D $\frac{3}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 4000 direct DUCEV and hold, continue climb-in-hold to 4000.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	---	---	---------------------------	----------------------------	-------------------------

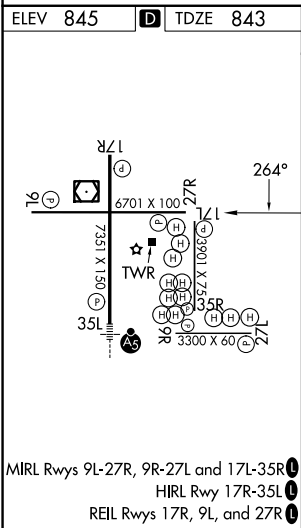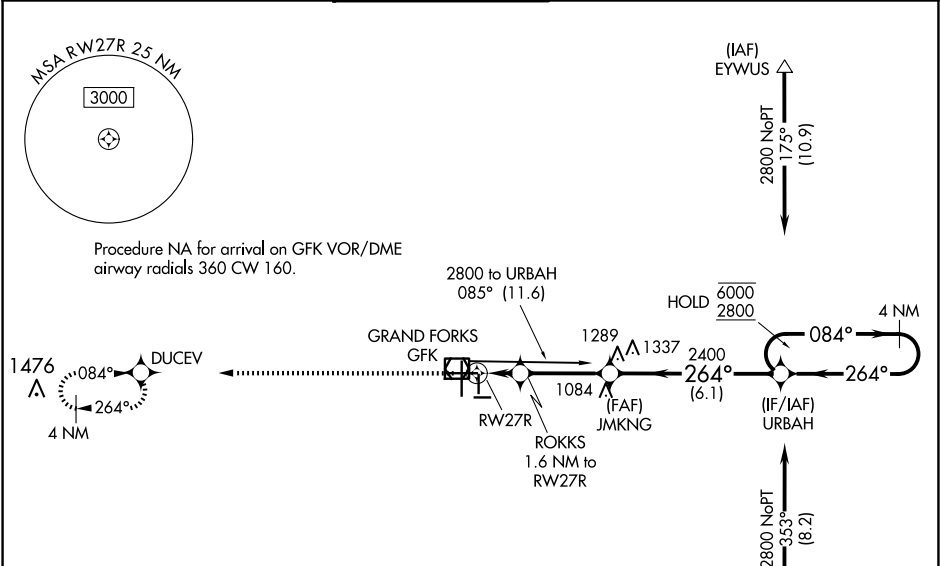

4000	DUCEV	ROKKS 1.6 NM to RW27R	JMKNG 2400	URBAB 4 NM Holding Pattern
1	0.6	3.2 NM	6.1 NM	
CATEGORY	A	B	C	D
LPV DA	1043- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)		
LNAV/VNAV DA	1117- $\frac{7}{8}$	274 (300- $\frac{7}{8}$)		
LNAV MDA	1220-1	377 (400-1)		
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 $\frac{1}{2}$ 555 (600- $\frac{1}{2}$)	1420-2 575 (600-2)