

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 56223 W03A | APP CRS 028° | Rwy Idg TDZE 888 Apt Elev 918 | 8003 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 3

APPLETON INTL (ATW)

▼


▲

Baro-VNAV NA below -16°C (4°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Green Bay-Austin Straubel Intl altimeter setting and increase all DAs/MDAs 100 feet. Baro/VNAV and VDP NA when using Green Bay-Austin Straubel Intl altimeter setting. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats.

MALSR

MISSED APPROACH: Climb to 2700 direct ASIGE and hold.

| | | | | |
|-----------------------|--|--|-------------------------|-------------------------|
| ATIS 127.15 | GREEN BAY APP CON★ 126.3 338.2 | APPLETON TOWER★ 119.6 (CTAF) 0 | GND CON 121.7 | UNICOM 122.95 |
|-----------------------|--|--|-------------------------|-------------------------|

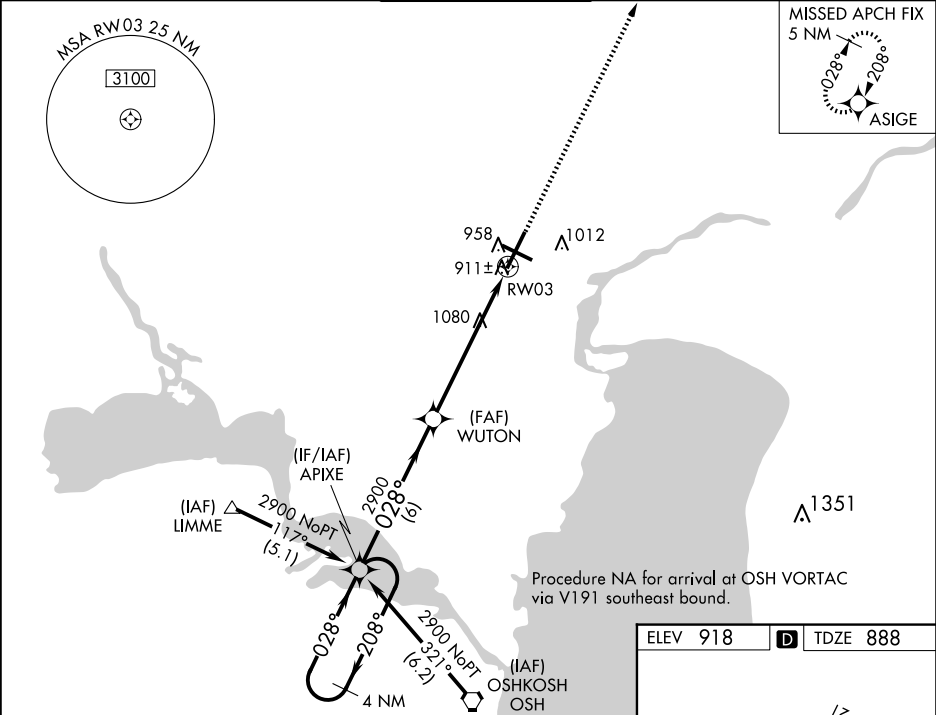

| | | | | | | |
|----------------------|---------------------|-------------|------------------------|------------------------|-----------------|-------|
| 4 NM Holding Pattern | | | | | 2700 | ASIGE |
| GP 3.00° TCH 47 | | | | | *1.5 NM to RW03 | |
| *LNAV only | | | | | RW03 | |
| CATEGORY | A | B | C | D | | |
| LPV DA | 1138/24 250 (300-½) | | | | | |
| LNAV/VNAV DA | 1232/40 344 (400-¾) | | | | | |
| LNAV MDA | 1400/24 | 512 (500-½) | 1400/50 512 (500-1) | 1400/60 512 (500-¼) | | |
| CIRCLING | 1400-1 | 482 (500-1) | 1400-1½ 482 (500-½) | 1480-2 562 (600-2) | | |

