

WAAS CH 77900 W13A	APP CRS 130°	Rwy Ldg TDZE 1301 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 13

MITCHELL MUNI (MHE)

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting.

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

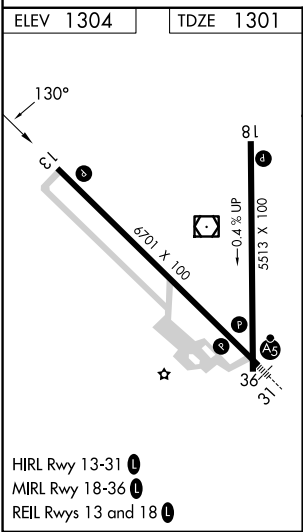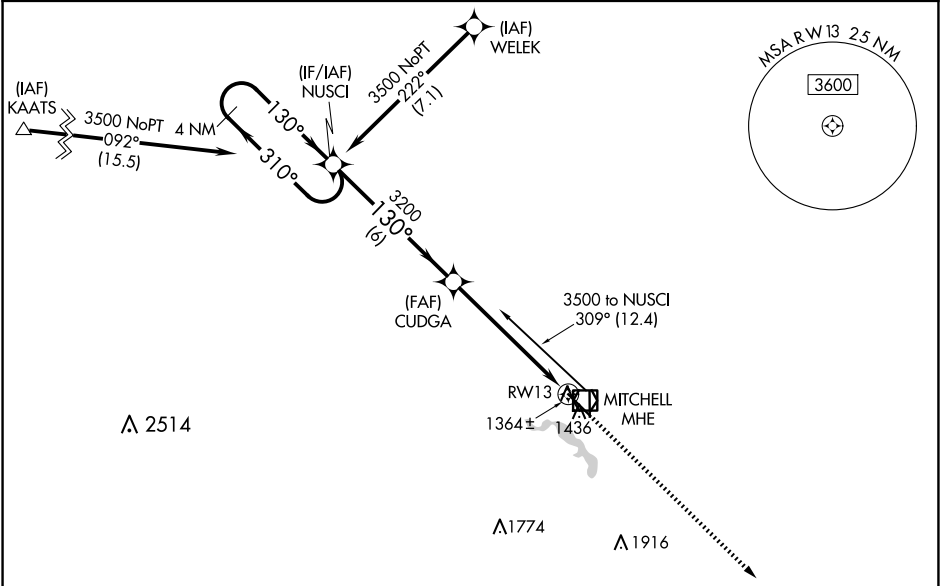

4 NM Holding Pattern				JUTUB 4 NM	
NUSCI				JUTUB	
3500 310° 130°				3200	
GP 3.00° TCH 46				*0.9 NM to RWY13	
CUDGA				*LNAV only	
3200				RWY13	
6 NM 4.8 NM 0.9					
CATEGORY	A	B	C	D	
LPV DA	1575-1 274 (300-1)				
LNAV/VNAV DA	1627-1¼ 326 (400-1¼)				
LNAV MDA	1620-1 319 (400-1)				
CIRCLING	1740-1¼ 436 (500-1¼)	1760-1¼ 456 (500-1¼)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)	