

VOR/DME MHE 114.15 Chan 88 (Y)	APP CRS 117°	Rwy Ldg TDZE Apt Elev	6701 1301 1304
--	------------------------	-----------------------------	---


VOR RWY 13
MITCHELL MUNI (MHE)

V VDP NA when using HON altimeter setting. When local altimeter setting not received, use HON altimeter setting and increase all MDAs 100 feet and S-13 visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM; increase GEBEL fix minimums (DME Required) S-13 visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ¼ SM.

A

MISSED APPROACH: Climb to 2900 then climbing left turn to 3000 direct MHE VOR/DME and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

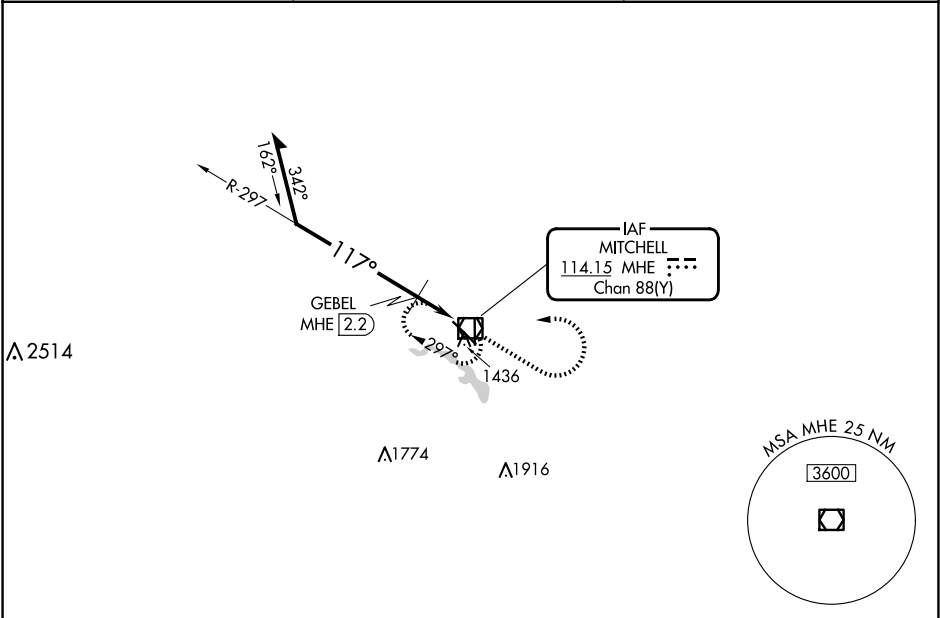

ELEV 1304

TDZE 1301

Remain within 10 NM

2900

297°

117°

*1860

GEBEL MHE 2.2

3.13°

TCH 45

MHE 1.7

MHE VOR/DME 3000

2900

3000

MHE

*1960 when using HON altimeter setting

0.5

1.1 NM

0.6

CATEGORY

A

B

C

D

S-13

1860-1

559 (600-1)

1860-1½

559 (600-1½)

CIRCLING

1860-1

556 (600-1)

1860-1½

1860-2

556 (600-1½)

556 (600-2)

GEBEL FIX MINIMUMS (DME REQUIRED)

S-13

1680-1

379 (400-1)

CIRCLING

1740-1

1760-1

1820-1½

1860-2

436 (500-1)

456 (500-1)

516 (600-1½)

556 (600-2)

117°

6701 x 100

5513 x 100

36°

311°

81

0.4 % UP

☆

HIRL Rwy 13-31

MIRL Rwy 18-36

REIL Rwy 13 and 18