

LOC I-CEW  
**111.9**

APP CRS  
**175°**

Rwy Idg  
TDZE **213**  
Apt Elev **214**

ILS or LOC RWY 17

BOB SIKES(CEW)




ADF required.

NA

Circling NA for Cat D West of Rwy 17-35. Autopilot coupled approach NA. When local altimeter setting not received, use Eglin AFB altimeter setting and increase S-ILS 17 DA to 472 and all MDA 60 feet, increase S-LOC 17 Cat C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct KOBRA LOM and hold.

ASOS <b>119.275</b>	EGLIN APP CON <b>124.05 284.65</b>	UNICOM <b>123.075 (CTAF) 0</b>
------------------------	---------------------------------------	-----------------------------------

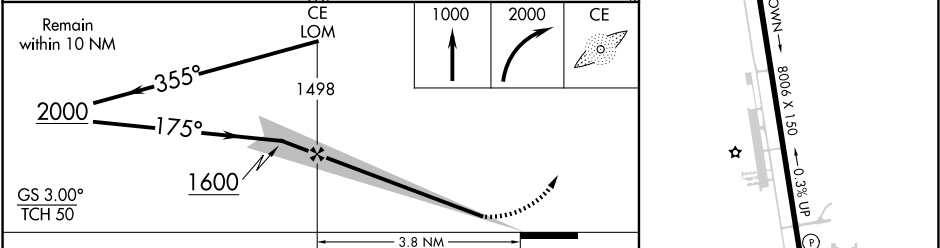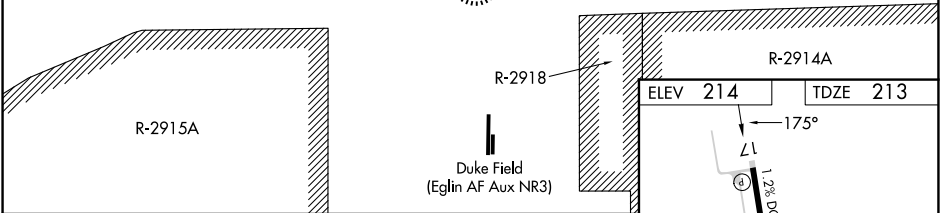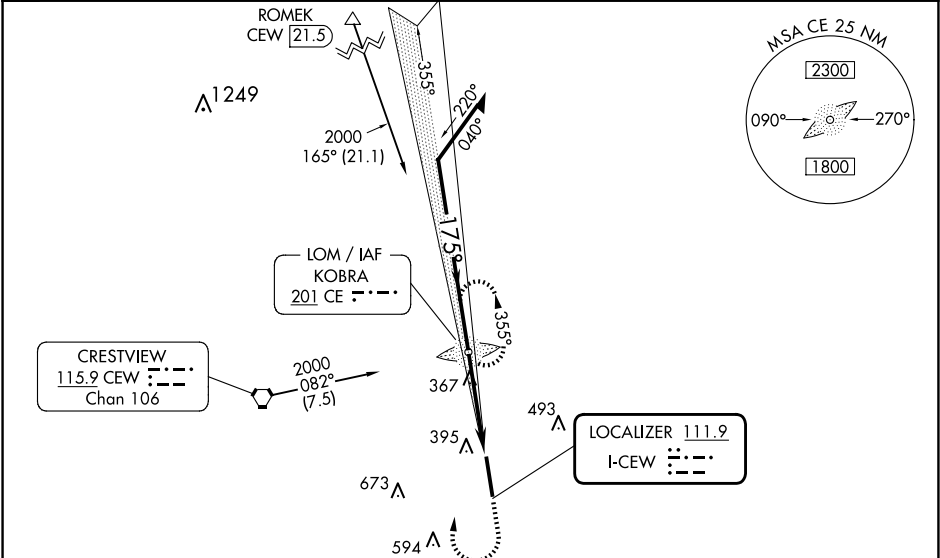

CATEGORY	A	B	C	D
S-ILS 17	413-¾ 200 (200-¾)			
S-LOC 17	620-1	407 (500-1)	620-1⅛	407 (500-1⅛)
CIRCLING	700-1	486 (500-1)	820-1¾ 606 (700-1¾)	840-2 626 (700-2)

HIRL Rwy 17-35					
FAF to MAP 3.8 NM					
Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16