
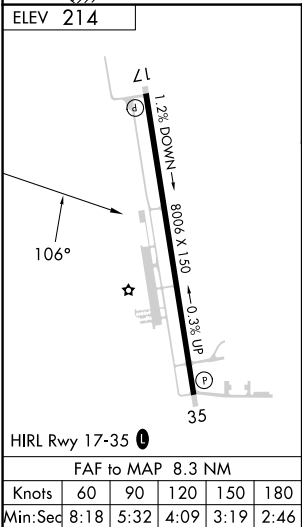


VORTAC CEW 115.9 Chan 106	APP CRS 106°	Rwy Idg TDZE Apt Elev N/A N/A 214
---	------------------------	---

VOR-A

BOB SIKES(CEW)

<div><div>▼</div><div>▲</div></div> <div>Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.</div>	<div>ASOS</div> <div>119.275</div>	<div>EGLIN APP CON</div> <div>124.05 284.65</div>	<div>UNICOM</div> <div>123.075 (CTAF) 0</div>
--	---	--	--

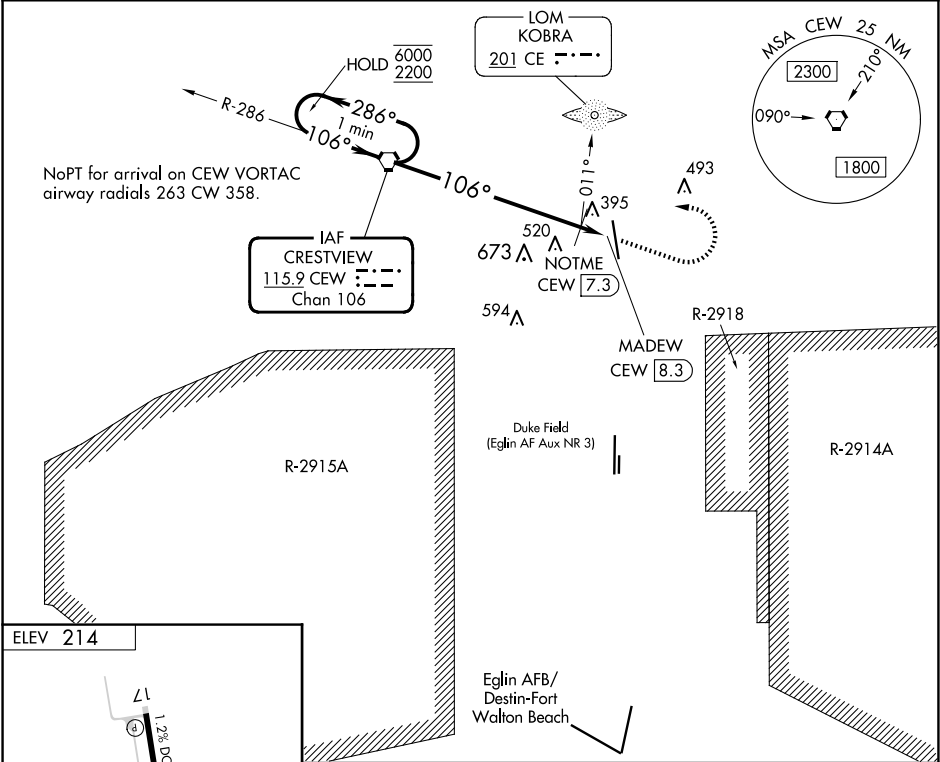

One Minute Holding Pattern		CEW VORTAC		1200 ↑	2200 ↷	CEW ⬡
6000 ← 286° 2200 → 106°		* 106°		NOTME CEW 7.3 MADEW CEW 8.3 * 900		
* 960 when using Eglin AFB altimeter setting.		7.3 NM		1 NM		
CATEGORY	A	B	C	D		
CIRCLING	900-1	686 (700-1)	900-2 686 (700-2)	900-2¼ 686 (700-2¼)		
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)						
CIRCLING	700-1	486 (500-1)	820-1¾ 606 (700-1¾)	840-2 626 (700-2)		