




WAAS CH 58314 W31A	APP CRS 311°	Rwy Idg 6400 TDZE 1450 Apt Elev 1469
----------------------------------------	------------------------	-----------------------------------------------------------------


RNAV (GPS) RWY 31
DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.	<p> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Cando altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM, LNAV Cts C/D visibility to 1 SM. When local altimeter setting not received, use Cando altimeter setting and increase LPV DA 1711 feet, LNAV/VNAV DA to 1782 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS when using Cando altimeter setting, increase LPV all Cts visibility to ½ SM.</p>	<p>MALSR</p> 	<p>MISSED APPROACH: Climb to 3400 direct KRAMR and hold.</p>
-----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------	--------------------------------------------------------------

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------------	---------------------------------

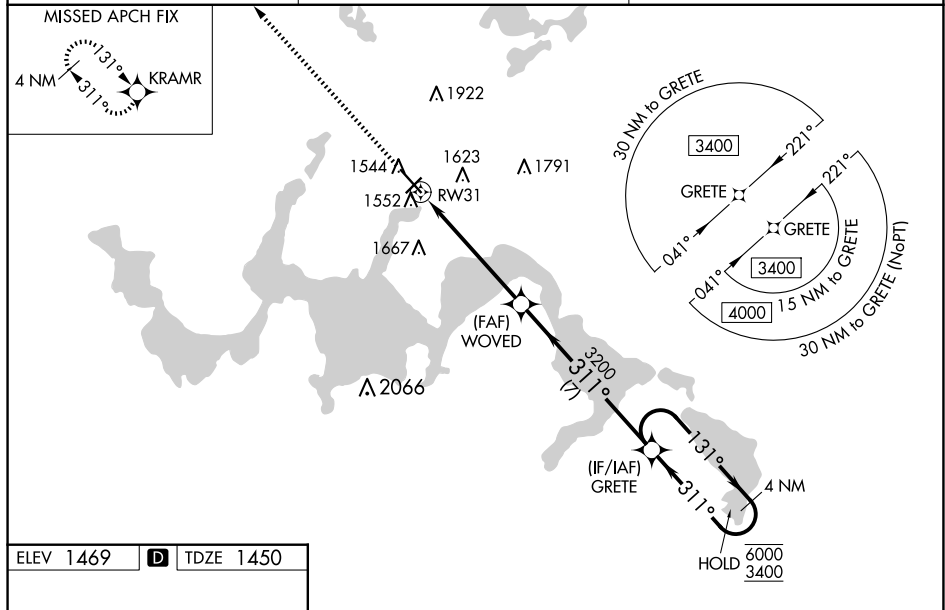

ELEV 1469	D	TDZE 1450
-----------	----------	-----------

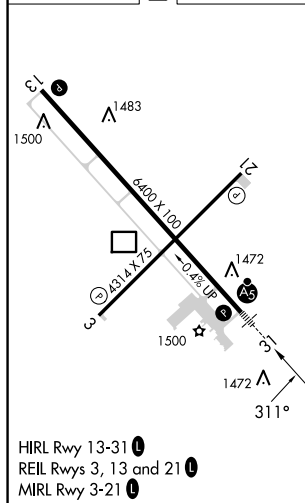[illegible]