

LOC/DME I-EEE

110.7

Chan 44

APP CRS

014°

Rwy Ldg

5701

TDZE

956

Apt Elev

956

ILS or LOC RWY 1

AMES MUNI (AMW)

DME required.

NA


-26°C

For inop ALS increase S-LOC 1 Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 on heading 240° and TNU VOR/DME R-296 to HANSD INT/37.8 DME and hold, continue climb-in-hold to 4000.

ASOS	DES MOINES APP CON	CLNC DEL	UNICOM
132.025	123.9 307.15	126.0	122.7 (CTAF) 0

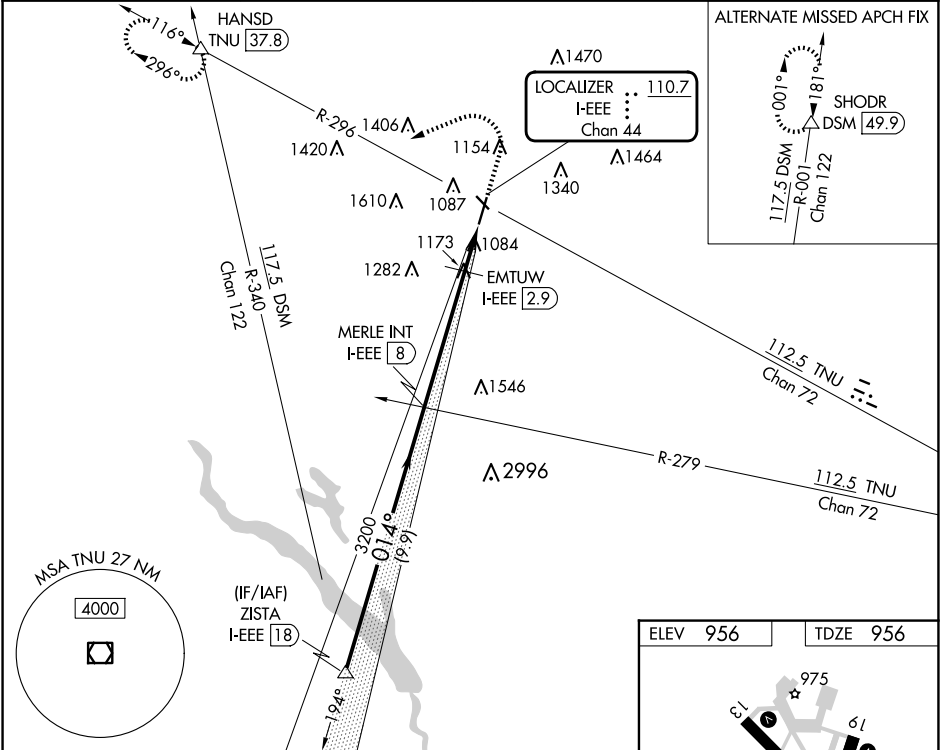

	ZISTA I-EEE 18	MERLE INT I-EEE 8	EMTUW I-EEE 2.9	HANSD
	4000	3200	1580	△
	014°	3200	1580	
	GS 3.00°			
	TCH 50			
	9.9 NM	5.1 NM	1.8 NM	
CATEGORY	A	B	C	D
S-ILS 1	1206-½ 250 (300-½)			
S-LOC 1	1440-½	484 (500-½)	1440-1	484 (500-1)
CIRCLING	1440-1	1460-1	1640-2	1960-3
	484 (500-1)	504 (600-1)	684 (700-2)	1004 (1100-3)

