

VORTAC	EUR	Rwy Idg	5000
109.2	APP CRS	TDZE	285
Chan 29	187°	Apt Elev	285



VOR RWY 18
WEEDON FLD (EUR)

NA

When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUR VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) 0
-----------------	----------------------------------	--------------------------	--------------------------

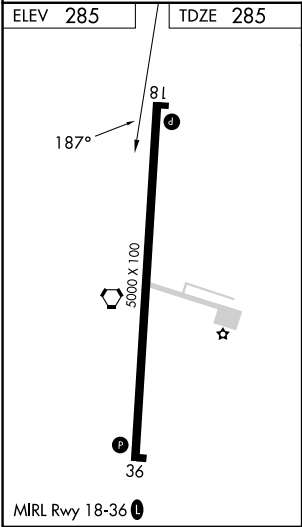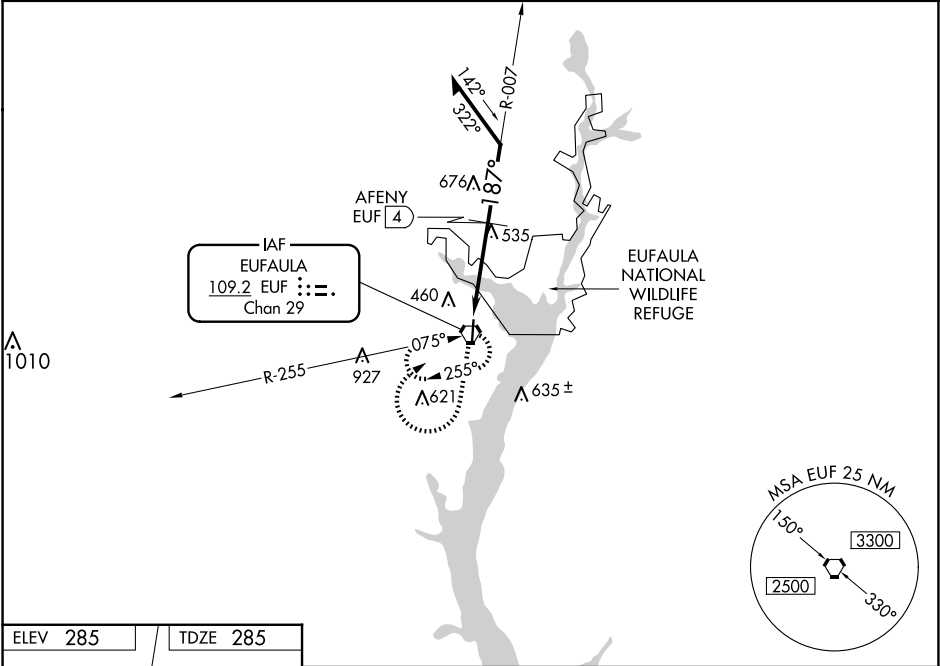

1500

2000

EUR

↑

↗

EUR VORTAC

Remain within 10 NM

007°

2000

187°

1040*

4 NM

AFENY EUR 4

*1080 when using Columbus, GA altimeter setting.

CATEGORY	A	B	C	D
S-18	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1040-2 755 (800-2)	755 (800-2)
CIRCLING	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)
AFENY FIX MINIMUMS (DME REQUIRED)				
S-18	900-1 615 (700-1)	900-1¾ 615 (700-1¾)	900-1¾ 615 (700-1¾)	615 (700-1¾)
CIRCLING	920-1 635 (700-1)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)	1060-2½ 775 (800-2½)

SE-4, 10 JUL 2025 to 07 AUG 2025

SE-4, 10 JUL 2025 to 07 AUG 2025