

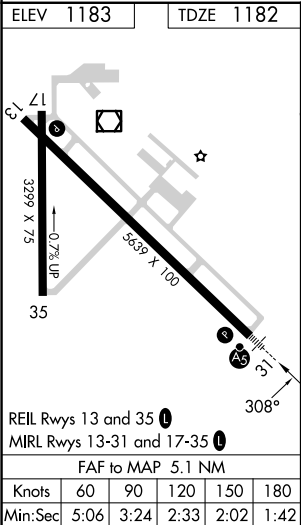
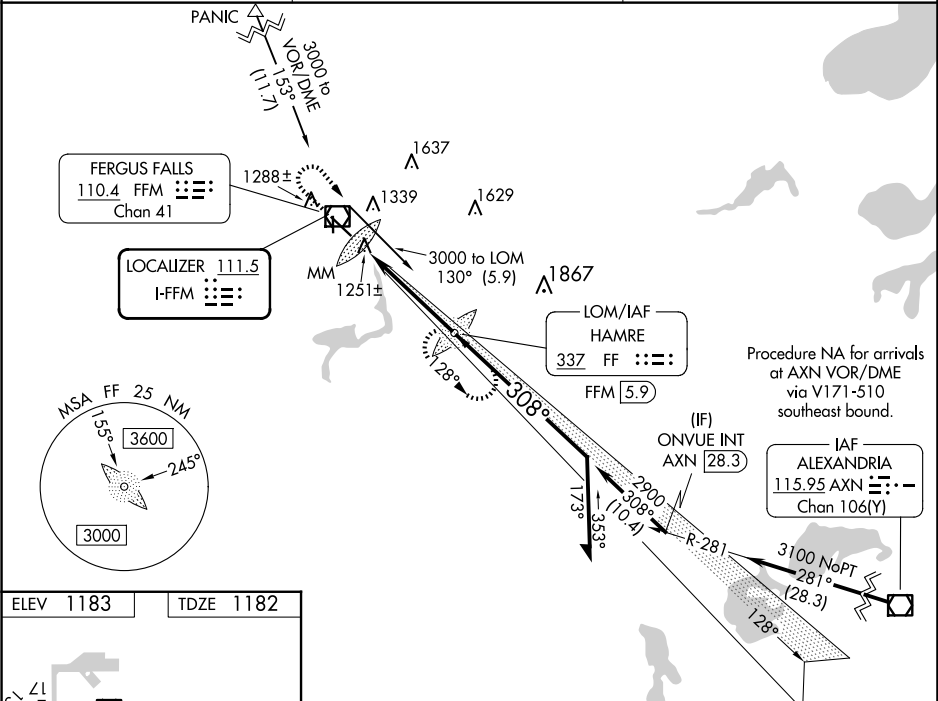
LOC I-FFM	APP CRS	Rwy Ldg	5639
111.5	308°	TDZE	1182
		Apt Elev	1183




ILS or LOC RWY 31

FERGUS FALLS MUNI/EINAR MICKELSON FLD (FFM)

ADF or DME required.	MALSR	MISSED APPROACH: Climb to 3000 then right turn direct HAMRE LOM/FFM 5.9 DME and hold.
NA When local altimeter setting not received, use Elbow Lake altimeter setting and increase DA to 1428 and all MDAs 60 feet; increase S-LOC Cat C/D visibility ½ SM and Circling Cat C/D visibility ¼ SM. For inop MALSR, increase S-LOC 31 Cat D visibility ¼ mile. GS unusable for coupled approaches below 1400.		

AWOS-3PT 119.05	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
--------------------	-----------------------------------	--------------------------



3000				FF LOM HAMRE FFM <u>5.9</u>	Remain within 10 NM
				2877	128°
					308°
					3000
					2900
					GS 3.00° TCH 52
				0.4	4.7 NM
CATEGORY	A	B	C	D	
S-ILS 31	1382-½ 200 (200-½)				
S-LOC 31	1520-½ 338 (400-½)			1520-¾ 338 (400-¾)	
CIRCLING	1640-1 457 (500-1)	1740-1 557 (600-1)	1820-1¾ 637 (700-1¾)	1940-2½ 757 (800-2½)	