

WAAS CH <b>78023</b> <b>W16A</b>	APP CRS <b>157°</b>	Rwy Idg TDZE <b>16</b> Apt Elev <b>16</b>
--	------------------------	---

RNAV (GPS) RWY 16

ABBEVILLE CHRIS CRUSTA MEML (IYA)

RNP APCH.


▼

▲

Baro-VNAV NA when using New Iberia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all DA 27 feet and all MDA 40 feet.

MISSED APPROACH:  
Climb to 2000 direct  
GASVE and hold.

AWOS-3PT <b>118.875</b>	LAFAYETTE APP CON ★ <b>121.1 268.7</b>	GCO <b>135.075</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	---	-----------------------	---------------------------------

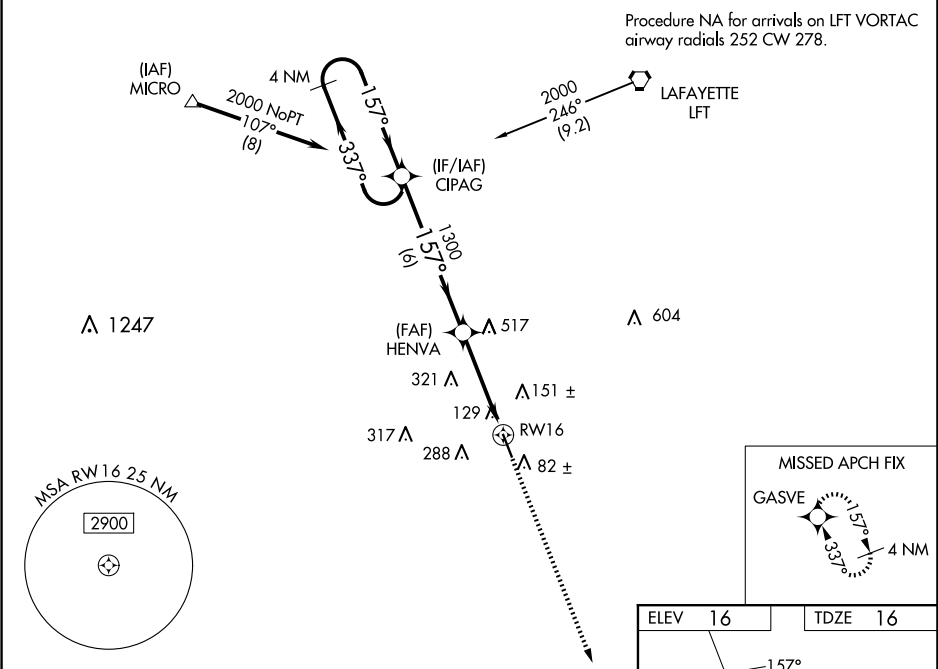

4 NM Holding Pattern

CIPAG

2000 ← 337° 157° →

GP 3.00° TCH 50

HENVA 1300

RW16

6 NM 3.9 NM

CATEGORY	A	B	C	D
LPV DA	266-1	250 (300-1)		NA
LNAV/VNAV DA	279-1	263 (300-1)		NA
LNAV MDA	380-1	364 (400-1)		NA
CIRCLING	520-1 504 (600-1)	600-1 584 (600-1)	700-2 684 (700-2)	NA

