


APP CRS	Rwy Idg	5000
237°	TDZE	302
	Apt Elev	302

RNAV (GPS) RWY 24

WOODWARD FLD (CDN)

<div><div>▼</div><div>▲ NA</div></div>	When local altimeter setting not received, use Columbia altimeter setting and increase all MDAs 100 feet; increase LNAV and Circling visibility Cats C/D ¼ SM. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.	MISSED APPROACH: Climbing left turn to 3000 direct IBAYE and hold.
--	--	--

AWOS-3PT 119.975	SHAW APP CON ★ 125.4 318.1	UNICOM 123.0 (CTAF) ①
---------------------	-------------------------------	--------------------------

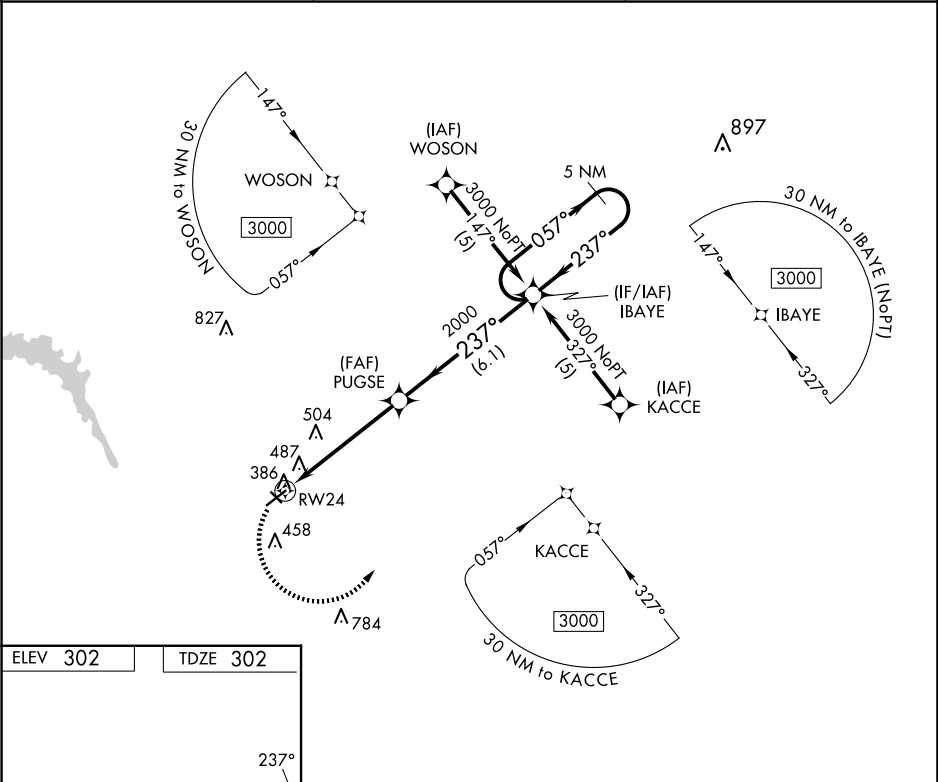

3000

IBAYE

5 NM Holding Pattern

PUGSE

RW24

3.04°

TCH 30

5.2 NM

6.1 NM

057°

237°

3000

2000

237°

MIRL Rwy 6-24

REIL Rws 6 and 24

CATEGORY	A	B	C	D
LNAV MDA	800-1	498 (500-1)	800-1¼ 498 (500-1¼)	800-1½ 498 (500-1½)
CIRCLING	840-1	538 (600-1)	840-1½ 538 (600-1½)	900-2 598 (600-2)