





LOC I-PEK	APP CRS	Rwy ldg	10000
110.3	257°	TDZE	27
		Apt Elev	30

ILS Y or LOC Y RWY 26

JACKSONVILLE INTL (JAX)

ADF required. RADAR required for procedure entry.			<div>MALSR</div> <div></div>	MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.	
<div></div>	For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.				
D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC

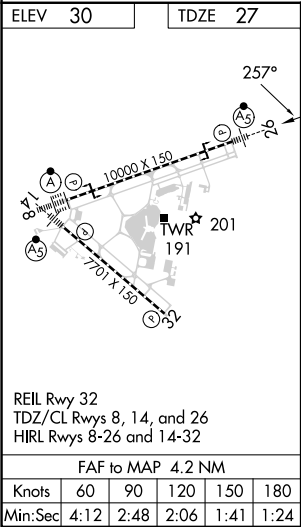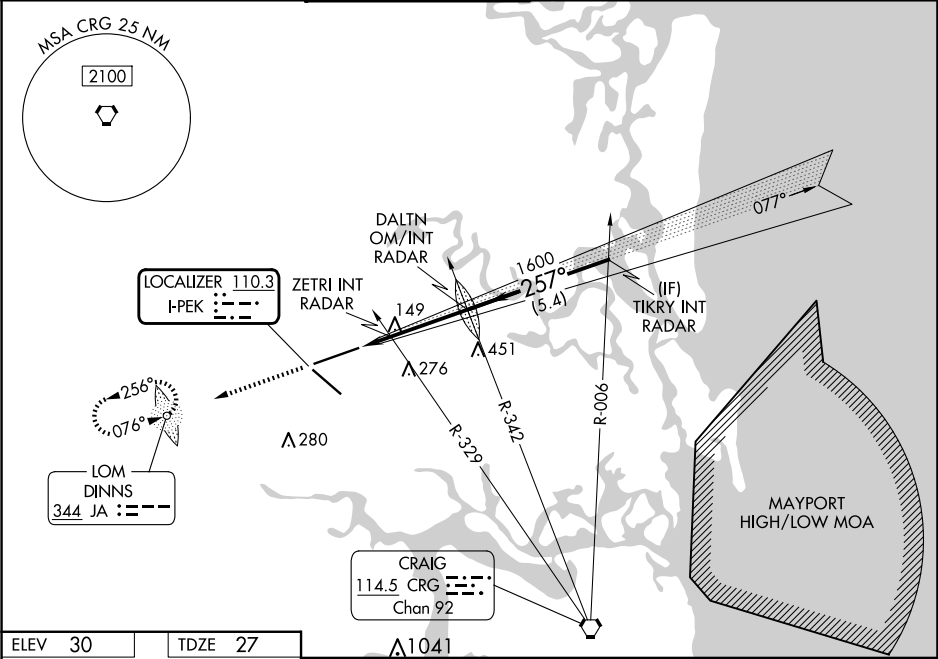

<div>3000</div> <div>↑</div>		<div>Δ 1041</div> <div>DINNS</div> <div></div>	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).	
		<div>ZETRI INT RADAR</div> <div>1402</div>	<div>DALTN OM/INT RADAR</div> <div>1600</div>	<div>TIKRY INT RADAR</div> <div>2000</div>
<div>480</div>		<div>257°</div>		<div>GS 3.00°</div> <div>TCH 55</div>
<div>1.2 NM</div>		<div>3 NM</div>	<div>5.4 NM</div>	
CATEGORY	A	B	C	D
S-ILS 26	227/18 200 (200-½)			
S-LOC 26	480/24 453 (500-½)		480/45 453 (500-¾)	
<div>C</div> CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 26	400/24 373 (400-½)		400/35 373 (400-¾)	
<div>C</div> CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	