






WAAS CH <b>50526</b> <b>W08A</b>	APP CRS <b>076°</b>	Rwy Idg <b>10000</b> TDZE <b>30</b> Apt Elev <b>30</b>
--	------------------------	--

RNAV (GPS) Z RWY 8  
JACKSONVILLE INTL (JAX)

RNP APCH-GPS.			ALSIF-2 	MISSED APPROACH: Climb to 2000 direct YEJWO and hold.	
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.					
D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC

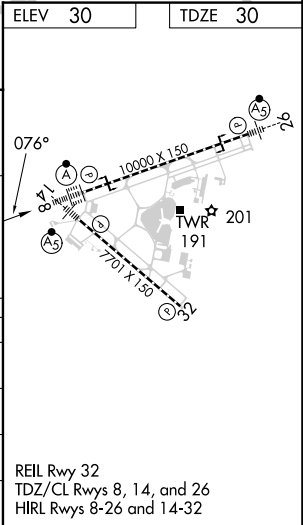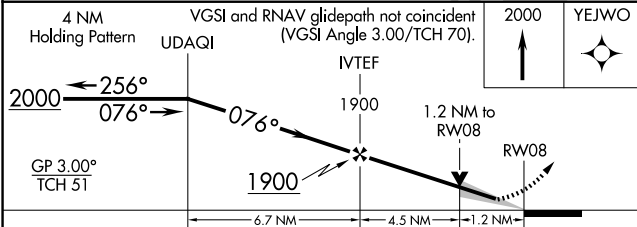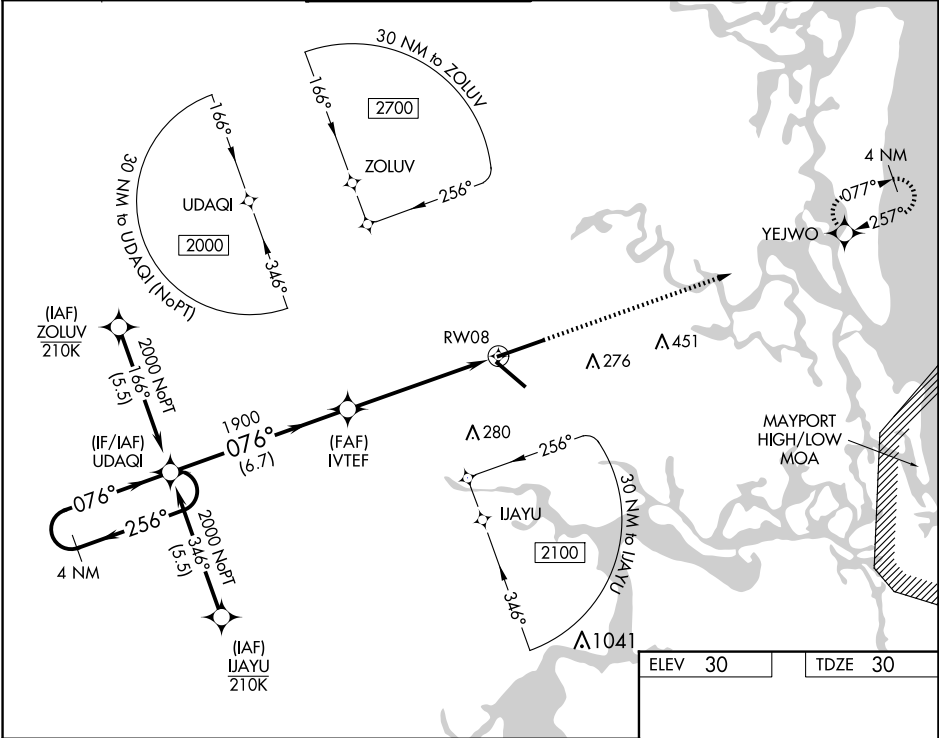

CATEGORY	A	B	C	D
LPV DA	230/18 200 (200-½)			
LNAV/VNAV DA	364/32 334 (400-¾)			
LNAV MDA	480/24 450 (500-½)		480/45 450 (500-¾)	
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	580-2 550 (600-2)

SE-3, 10 JUL 2025 to 07 AUG 2025

SE-3, 10 JUL 2025 to 07 AUG 2025