# RNAV (GPS) RWY 31

## WEST BEND MUNI (ETB)

| WAAS | APP CRS | Rwy Idg | 4494 |
|---|---|---|---|
| CH 93816 | 308° | TDZE | 879 |
| W31A | | Apt Elev | 887 |

RNP APCH - GPS.

Baro-VNAV NA when using Milwaukee/Lawrence J. Timmerman altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Milwaukee/Lawrence J.Timmerman altimeter setting and increase all DA 64 feet and all MDA 80 feet. Increase LPV all Cats and LNAV and Circling Cats C/D visibility ¼ mile. Circling Rwy 6 NA at night.

MISSED APPROACH: Climb to 3000 direct JESIB and hold.

| AWOS-3 | MILWAUKEE APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 120.0 | 125.35 307.0 | 124.75 | 123.05 (CTAF) L |

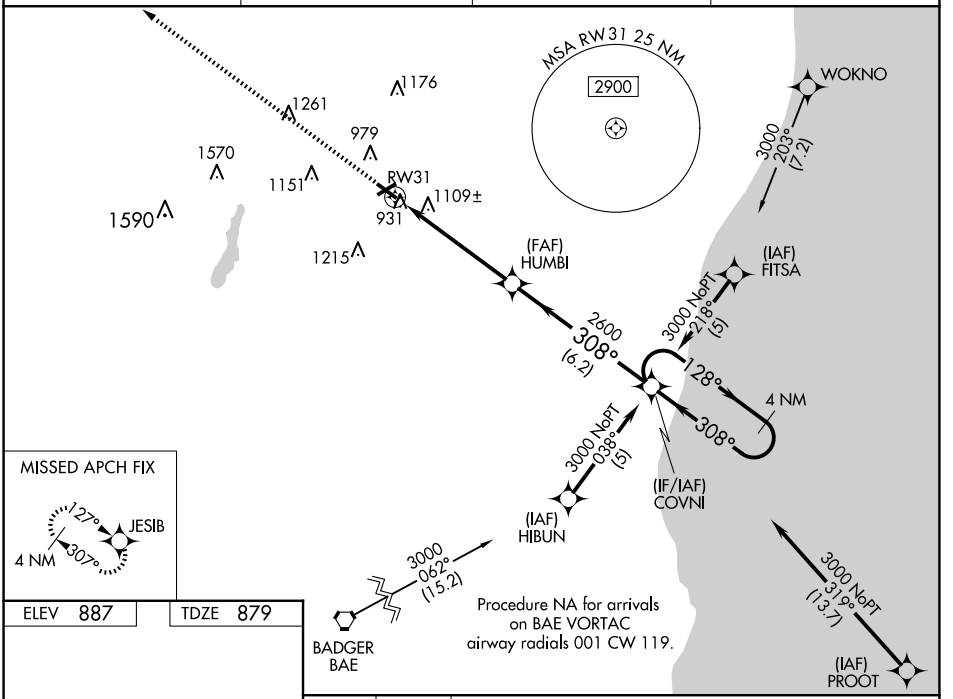


ELEV 887 TDZE 879




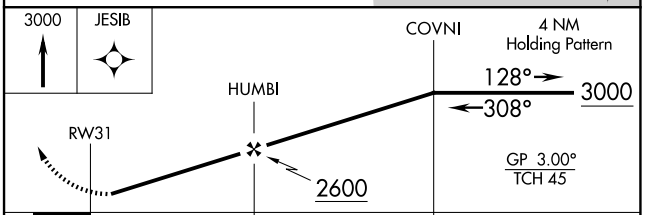


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1175-1 296 (300-1) | | | |
| LNAV/VNAV DA | 1482-2 603 (600-2) | | | |
| LNAV MDA | 1420-1 541 (600-1) | | 1420-1½ 541 (600-1½) | 1420-1¾ 541 (600-1¾) |
| CIRCLING | 1420-1 533 (600-1) | 1520-1 633 (700-1) | 1560-2 673 (700-2) | 1560-2¼ 673 (700-2¼) |

REIL Rwys 13 and 31 L
MIRL Rwys 6-24 and 13-31 L



EC-3, 10 JUL 2025 to 07 AUG 2025
EC-3, 10 JUL 2025 to 07 AUG 2025