



RNP APCH.			MISSED APPROACH: Climb to 4100 direct DIYER and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.			
AWOS-3 118.125	HOUSTON CENTER 134.95 269.4	CLNC DEL 134.95	UNICOM 122.7 (CTAF) 0



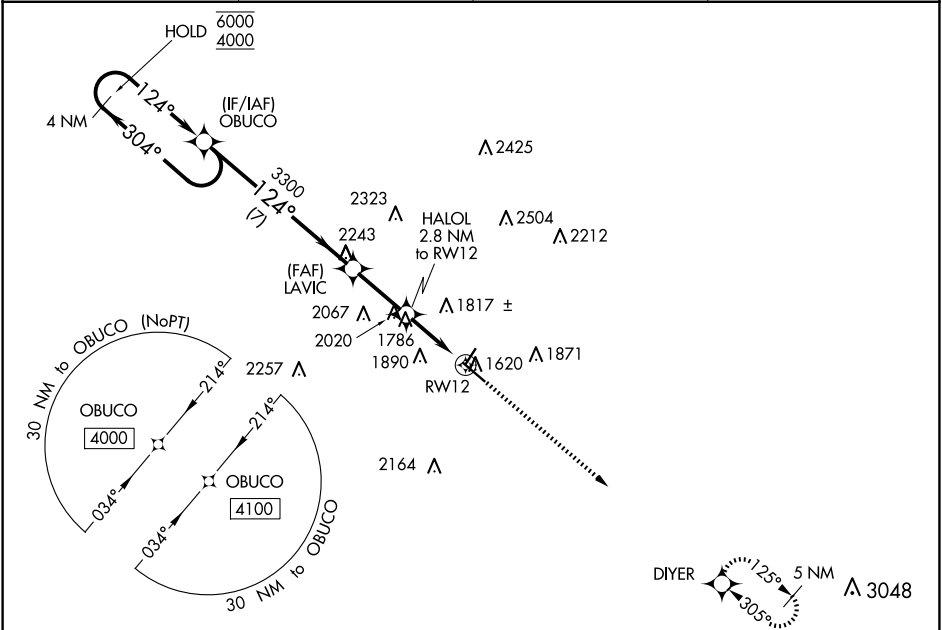

ELEV 1617

D

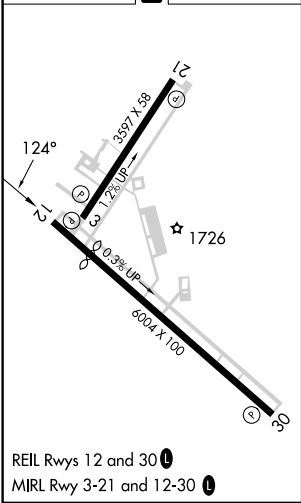TDZE 1586



4 NM Holding Pattern		4100 ↑		DIYER 	
OBUCO		LAVIC 3300		HALOL 2.8 NM to RW12	
6000 ← 304° 4000 → 124°		* 2500		* 1.3 NM to RW12	
GP 3.00° TCH 40		* LNAV only.		RW12	
		7 NM		2.5 NM	
		1.5 NM		1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1836-1 250 (300-1)				
LNAV/ VNAV DA	1936-1½ 350 (400-1½)				
LNAV MDA	2040-1	454 (500-1)	2040-1¾	454 (500-1¾)	
 CIRCLING	2320-1 703 (800-1)	2340-1 723 (800-1)	2380-2¼ 763 (800-2¼)	2540-3 923 (1000-3)	