

ASOS  
118.925  
CINC DEL  
125.7  
CTAF  
122.7  
CLEVELAND DEP CON  
125.35 346.325

TOP ALTITUDE:  
ASSIGNED BY ATC



TAKEOFF MINIMUMS:  
Rwys 7, 25: Standard with a minimum climb of 500' per NM to 1300.

NOTE: RADAR required.  
NOTE: RNAV 1.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

ZAAPA FIVE DEPARTURE (RNAV)  
(ZAAPA5.ZAAPA) 26MAR20

AL-5703 (FAA)

LORAIN COUNTY RGNL (LPR)  
LORAIN/ELYRIA, OHIO

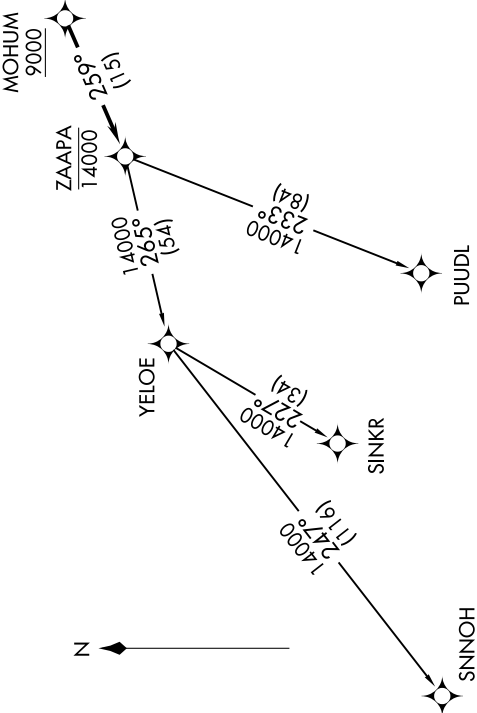

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 7: Climb on heading 073° to 1300, then on heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
TAKEOFF RUNWAY 25: Climb on heading 253° to 1300, then right turn heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA5.PUUDL)  
SINKR TRANSITION (ZAAPA5.SINKR)  
SNNOH TRANSITION (ZAAPA5.SNNOH)

NOTE: Chart not to scale.

LORAIN/ELYRIA, OHIO  
LORAIN COUNTY RGNL (LPR)