

VORTAC LAL	APP CRS	Rwy Idg	5000
116.0	101°	TDZE	125
Chan 107		Apt Elev	125



VOR RWY 9L
BARTOW EXEC (BOW)

DME required.

⚠ Circling Rwy 9R, 27L NA at night. Rwy 9L helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting; increase all MDA 120 feet, increase S-9L Cat C/D visibility ¾ SM and Circling Cat C/D visibility ½ SM. VDP NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 900 then climbing right turn to 2000 on LAL VORTAC R-118 to LAL VORTAC and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.20 (CTAF)	GND CON 121.9	UNICOM 122.95
-------------------	-------------------------------	---------------------------------	------------------	------------------

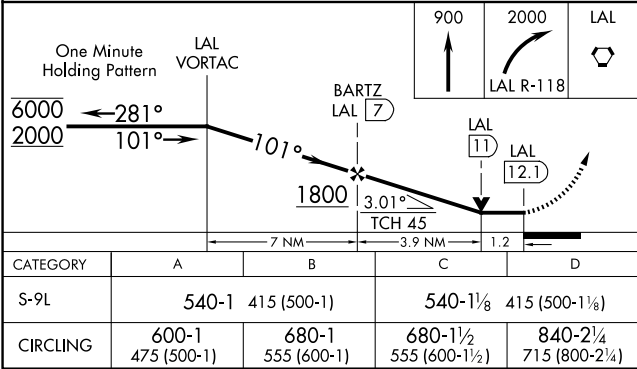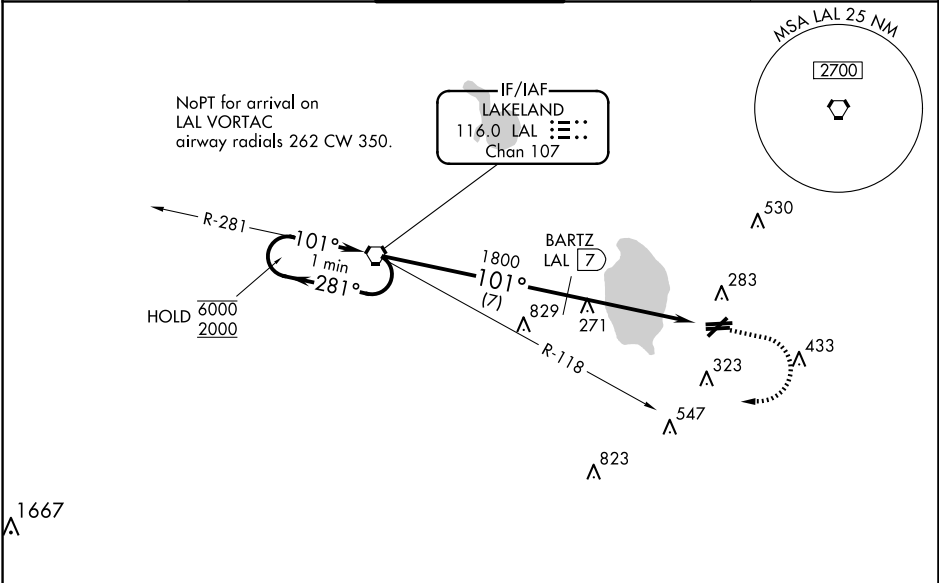

CATEGORY	A	B	C	D
S-9L	540-1	415 (500-1)	540-1½	415 (500-1½)
CIRCLING	600-1 475 (500-1)	680-1 555 (600-1)	680-1½ 555 (600-1½)	840-2¼ 715 (800-2¼)

