


APP CRS	Rwy Idg	5700
014°	TDZE	4078
	Apt Elev	4078

RNAV (GPS) RWY 1
PORTALES MUNI (PRZ)

T DME/DME RNP-0.3 NA. VDP NA when using Clovis Rgnl altimeter setting. When local altimeter setting not received, use Clovis Rgnl altimeter setting and increase all MDAs 80 feet; increase Circling Cat C visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climbing left turn to 6300 direct ECER1 and hold.

AWOS-3PT 118.175	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF) ①
----------------------------	--	--------------------------	---------------------------------

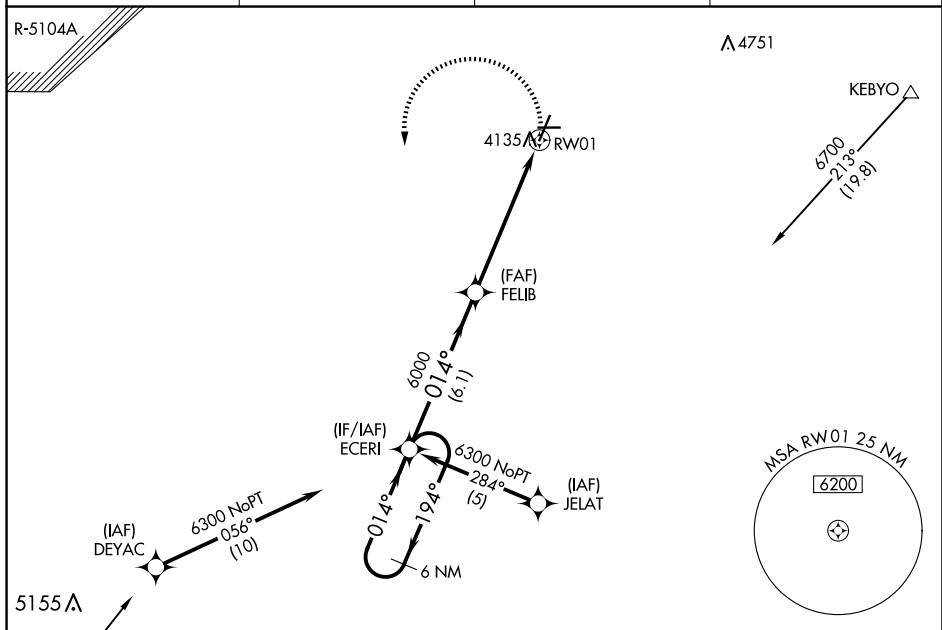

6 NM Holding Pattern

6300 ← 194° 014° →

ECERI

6.1 NM

4.4 NM

1.5 NM to RW01

6000

3.00° TCH 40

6300 ECERI

CATEGORY	A	B	C	D
LNAV MDA	4580-1	502 (600-1)	4580-1½ 502 (600-1½)	NA
CIRCLING	4580-1	502 (600-1)	4680-1¾ 602 (700-1¾)	NA

5700 X 60

014°

MIRM Rwy 1-19 and 8-26