
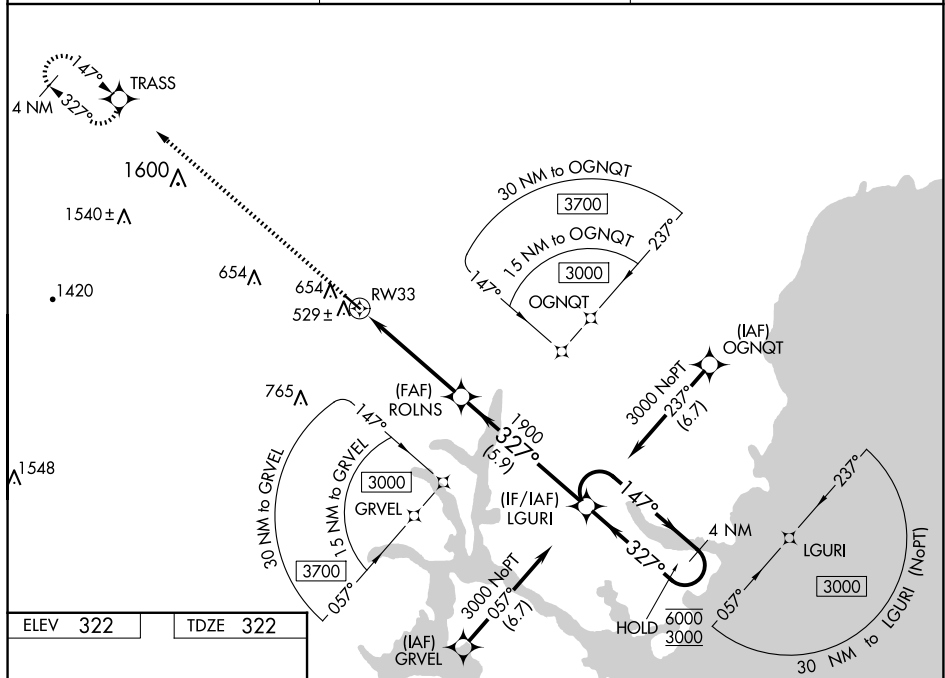


WAAS CH <b>72715</b> <b>W33A</b>	APP CRS <b>327°</b>	Rwy Idg <b>4201</b> TDZE <b>322</b> Apt Elev <b>322</b>
--	------------------------	---

RNAV (GPS) RWY 33  
SKYHAVEN (DAW)

RNP APCH - GPS.		
<p><b>T</b> Inop table does not apply to LPV and LNAV/VNAV all Cats.</p> <p><b>A</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV visibility Cat C to 1½ SM.</p>	<p>ODALS</p> 	<p>MISSED APPROACH: Climb to 3800 direct TRASS and hold, continue climb-in-hold to 3800.</p>

ASOS <b>135.275</b>	BOSTON APP CON <b>125.05 269.4</b>	UNICOM <b>122.7 (CTAF) ①</b>
------------------------	---------------------------------------	---------------------------------



CATEGORY	A	B	C	D
LPV DA	572- $\frac{3}{4}$	250 (300- $\frac{3}{4}$ )		NA
LNAV/VNAV DA	699-1	377 (400-1)		NA
LNAV MDA	780- $\frac{3}{4}$	458 (500- $\frac{3}{4}$ )	780-1 $\frac{1}{8}$ 458 (500-1 $\frac{1}{8}$ )	NA
<b>C</b> CIRCLING	960-1	638 (700-1)	960-1 $\frac{3}{4}$ 638 (700-1 $\frac{3}{4}$ )	NA