WAAS	APP CRS	Rwy Idg	4501
CH 70348	180°	TDZE	1326
W18A		Apt Elev	1326

RNAV (GPS) RWY 18

AUGUSTA MUNI (3AU)

RNP APCH - GPS.

Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AAO altimeter setting. When local altimeter setting not received, use AAO altimeter setting and increase LPV DA to 1624 feet; increase LNAV/VNAV DA to 1742 feet; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 3000 direct WAKOP and hold.

AWOS-3P	WICHITA APP CON	CLNC DEL	UNICOM
124.175	134.8 269.1	125.0	122.8 (CTAF) L

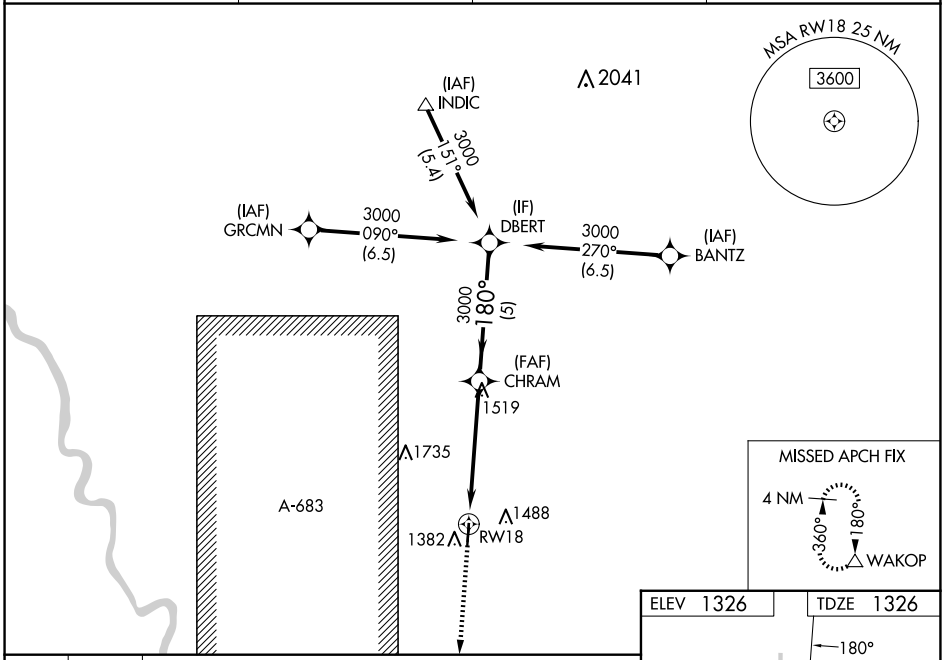

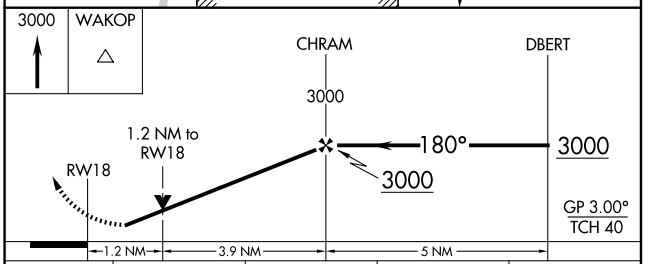

CATEGORY	A	B	C	D
LPV DA	1591-1 265 (300-1)			NA
LNAV/VNAV DA	1709-1⅛ 383 (400-1⅛)			NA
LNAV MDA	1760-1 434 (500-1)		1760-1¼ 434 (500-1¼)	NA
CIRCLING	1800-1 474 (500-1)	1820-1 494 (500-1)	1820-1½ 494 (500-1½)	NA

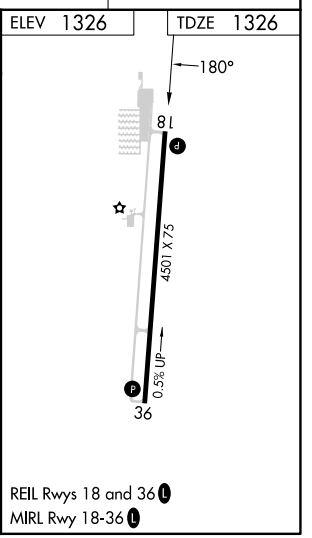

NC-2, 10 JUL 2025 to 07 AUG 2025
NC-2, 10 JUL 2025 to 07 AUG 2025