

APP CRS	Rwy Idg	4001
224°	TDZE	570
	Apt Elev	570

RNAV (GPS) RWY 22

NEWBERRY COUNTY (EOE)

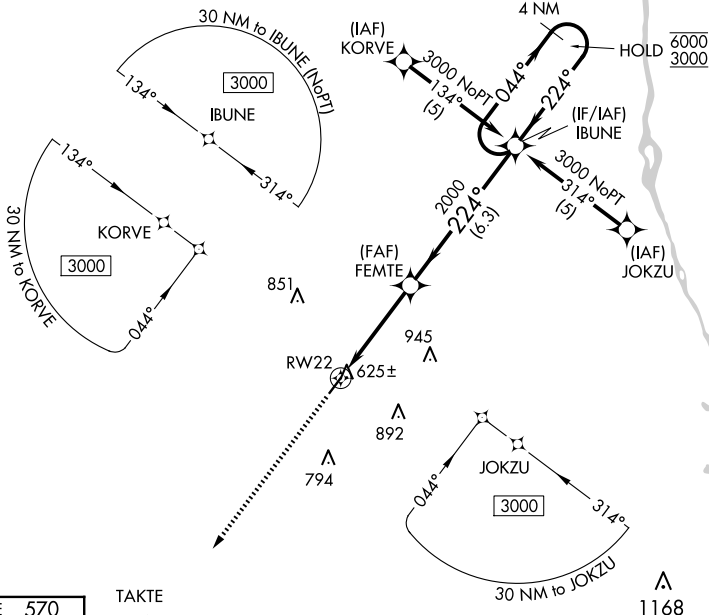
RNP APCH - GPS.

T VDP NA when using GRD altimeter setting. Rwy 22 helicopter visibility
A reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use
 GRD altimeter setting and increase all MDA 80 feet.

MISSED APPROACH: Climb to 3000 direct TAKTE and hold.

AWOS-3
124,275

COLUMBIA APP CON
133.4 285.6

UNICOM
122.8 (CTAF) **L**

ELEV	570		TDZE	570
------	-----	--	------	-----

TAKTE

A schematic diagram of a nanowire structure. It shows a central horizontal line representing the nanowire, with a width labeled as 4 nm. At one end of the nanowire, there is a circular feature with a four-pointed star-like shape inside, representing a quantum dot or a specific crystal facet. The angle between the nanowire axis and the line connecting to the circular feature is labeled as 044°. Another angle, 224°, is indicated between the nanowire axis and a dashed line extending from the circular feature.

3000

TAKT

4 NM
Holding Pattern

IBUNE

FEMTE

1.1 NM to

R

1

4

 $\leq 3.15^\circ$

11

CH 43

4.2 NIM

CATEGORY	A	B	C	D
LNAV MDA	980-1	410 (500-1)	NA	
CIRCLING	1080-1 510 (600-1)	1160-1 590 (600-1)	NA	

M|RL Rwy 4-22 **L**