

WAAS CH 93901 W36A	APP CRS 001°	Rwy Idg 6503 TDZE 296 Apt Elev 298
--	------------------------	---


RNAV (GPS) RWY 36

HATTIESBURG/LAUREL RGNL (PIB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Hattiesburg Bobby L Chain Muni altimeter setting: increase LPV DA to 597 feet and LNAV/VNAV DA to 676; increase all MDA 60 feet and visibility LNAV Cat C/D and Circling Cat C/D ¼ SM. Baro-VNAV NA when using Hattiesburg Bobby L Chain Muni altimeter setting.

MISSED APPROACH:
Climb to 2100 direct
SULYO and hold.

AWOS-3PT 128.325	HOUSTON CENTER 126.8 327.8	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

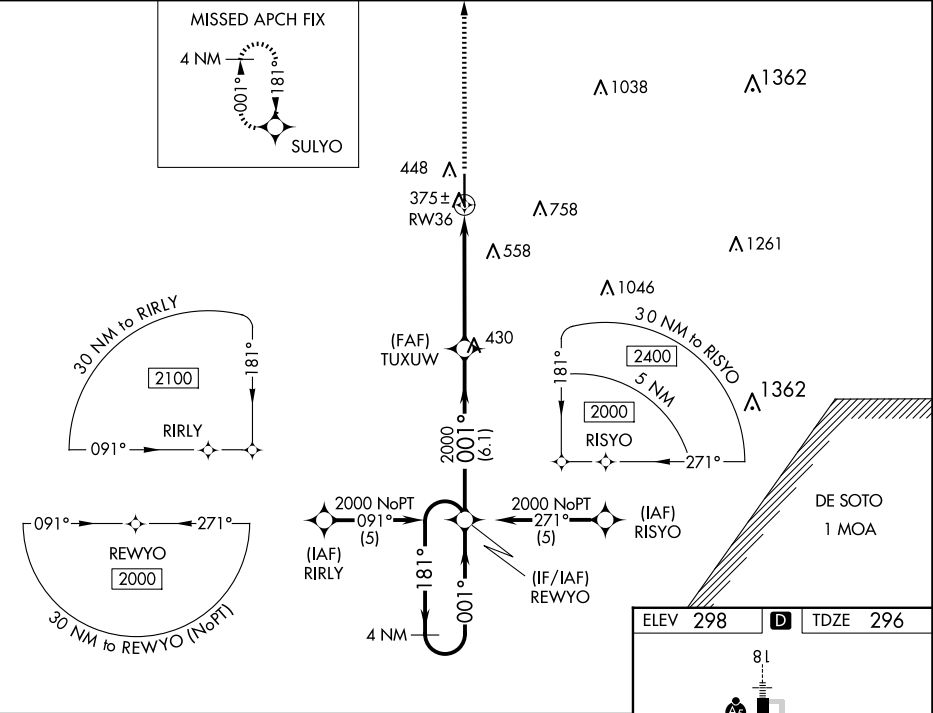

2100

↑

SULYO

✧

TUXUW

REWYO

4 NM Holding Pattern

181°

001°

001°

2000

2000

GP 3.00°

TCH 45

5.1 NM

6.1 NM

RW36

CATEGORY	A	B	C	D
LPV DA	546-1	250 (300-1)		
LNAV/ VNAV DA	625-1¼	329 (400-1¼)		
LNAV MDA	680-1	384 (400-1)	680-1¼	384 (400-1¼)
CIRCLING	760-1	462 (500-1)	1120-2½	1120-2¾
			822 (900-2½)	822 (900-2¾)

