WAAS	APP CRS	Rwy Idg	4402
CH 69218	110°	TDZE	2925
W11A		Apt Elev	2925

RNAV (GPS) RWY 11
THOMAS COUNTY (TIF)

Baro-VNAV NA when using North Platte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received use North Platte altimeter setting and increase all DA 137 feet and all MDA 140 feet, increase LPV and LNAV/VNAV Cats A and B visibility ½ mile. VDP NA with North Platte altimeter setting.

MISSED APPROACH: Climb to 5000 direct NUXRO and hold.

AWOS-3	DENVER CENTER	CTAF
120.825	127.95 338.2	122.9

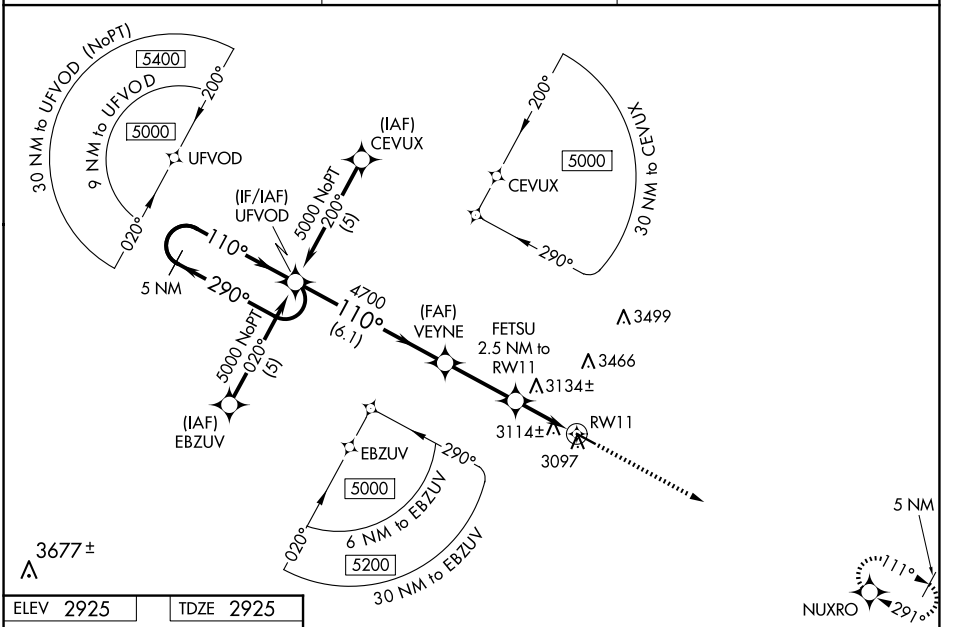

ELEV 2925	TDZE 2925



MIRL Rwy 11-29 (L)
REIL Rwys 11 and 29 (L)

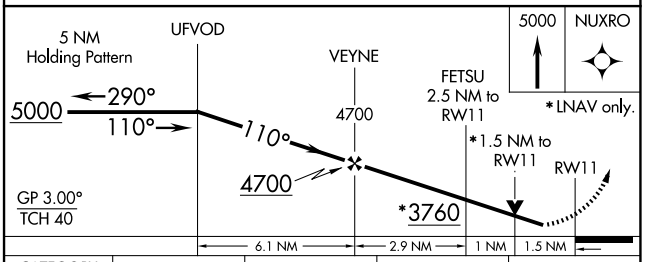

CATEGORY	A	B	C	D
LPV DA	3175-1	250 (300-1)	NA	
LNAV/VNAV DA	3490-2	565 (600-2)	NA	
LNAV MDA	3440-1	515 (600-1)	NA	
CIRCLING	3480-1	555 (600-1)	NA	

NC-2, 10 JUL 2025 to 07 AUG 2025
NC-2, 10 JUL 2025 to 07 AUG 2025