RNAV (GPS) RWY 23

MONROE COUNTY (MNV)

WAAS	APP CRS		
CH 72831 W23A	228°	Rwy Idg	3503
		TDZE	1030
		Apt Elev	1031

RNP APCH - GPS.

T A NA Baro-VNAV NA when using Mc Ghee Tyson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA NW of Rwy 5-23. When local altimeter setting not received, use Mc Ghee Tyson altimeter setting and increase all DA 64 feet and all MDA 80 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C, and Circling Cat C visibility ¼ mile. Rwy 23 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct CORPA on track 234° to ETOWA and hold.

AWOS-3	KNOXVILLE APP CON	UNICOM
118.475	123.9 353.6	123.0 (CTAF)

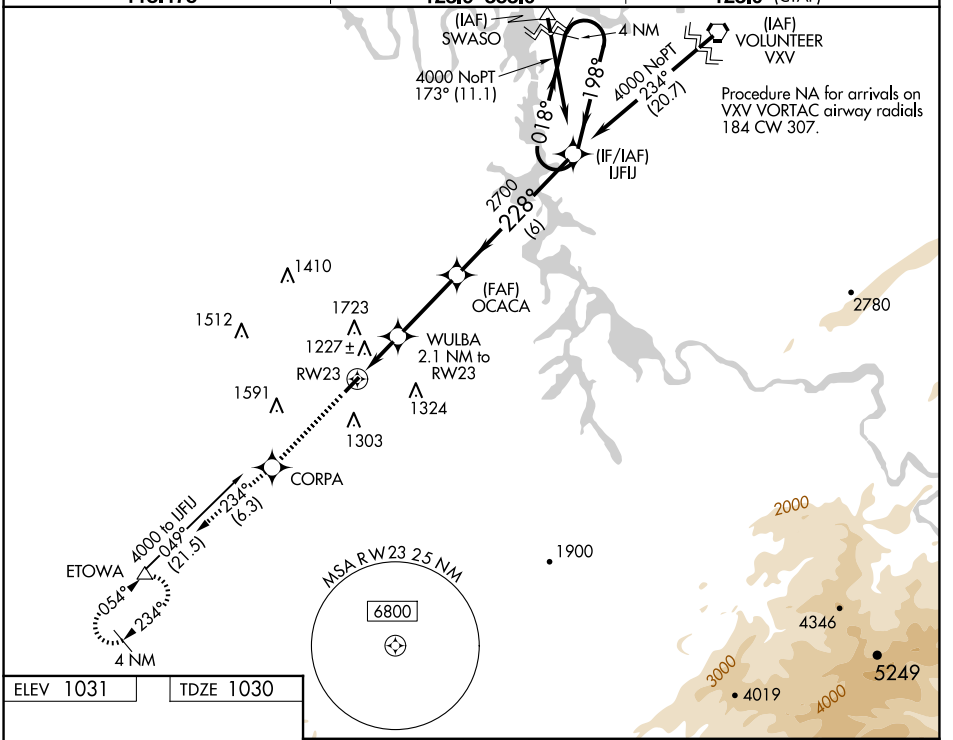

ELEV 1031	TDZE 1030



MIRL Rwy 5-23
REIL Rwys 5 and 23

3000	CORPA	tr 234°	ETOWA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 20).	4 NM Holding Pattern

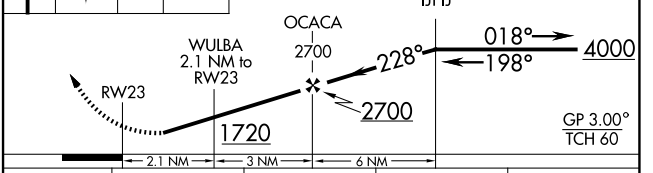

CATEGORY	A	B	C	D
LPV DA	1376-1⅛ 346 (400-1⅛)			NA
LNAV/VNAV DA	1548-1¾ 518 (600-1¾)			NA
LNAV MDA	1480-1 450 (500-1)		1480-1⅜ 450 (500-1⅜)	NA
CIRCLING	1620-1 589 (600-1)		1640-1¾ 609 (700-1¾)	NA

SE-1, 10 JUL 2025 to 07 AUG 2025
SE-1, 10 JUL 2025 to 07 AUG 2025