VOR/DME MTU	APP CRS	Rwy Idg	N/A
112.7	010°	TDZE	N/A
Chan 74		Apt Elev	5176

VOR-A

ROOSEVELT MUNI (74V)

T
A NA — When local altimeter setting not received, use Vernal altimeter setting and increase all MDA 80 feet, FOSLA fix minimums, increase Cat C visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 9000 direct MTU VOR/DME and hold, continue climb-in-hold to 9000.

AWOS-3P	SALT LAKE CENTER	UNICOM
118.975	135.77 257.7	122.8 (CTAF) L

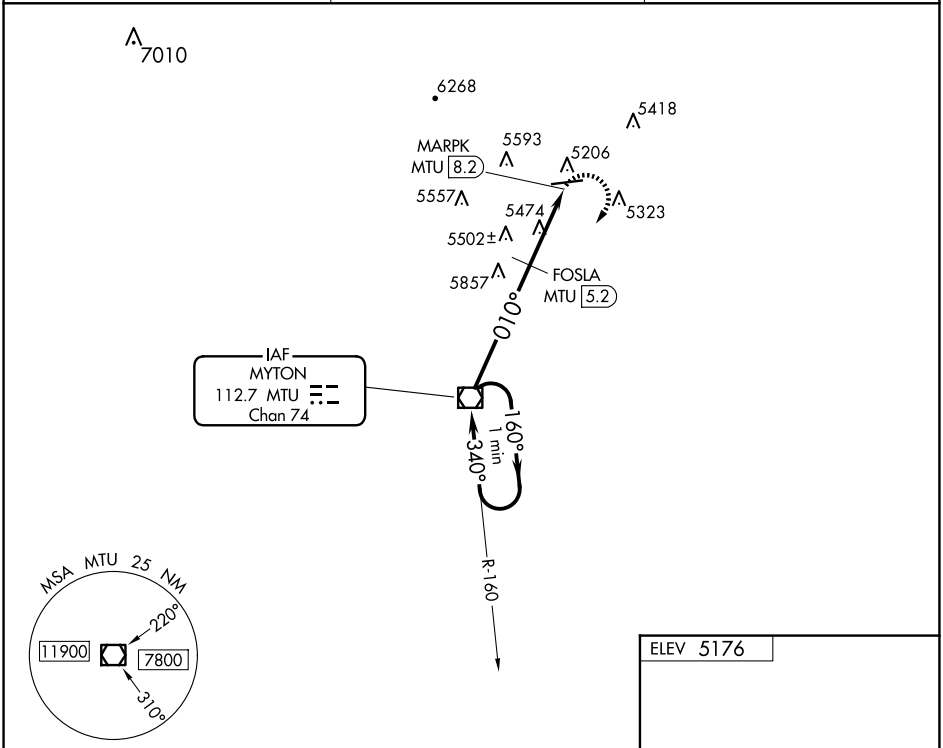

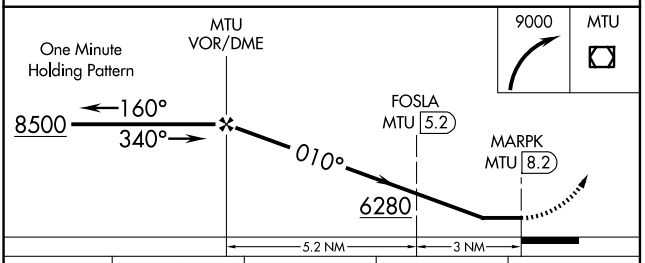



CATEGORY	A	B	C	D
C CIRCLING	6280-1¼ 1104 (1200-1¼)	6280-1½ 1104 (1200-1½)	6280-3 1104 (1200-3)	6340-3 1164 (1200-3)
FOSLA FIX MINIMUMS				
C CIRCLING	5760-1 584 (600-1)	5900-1 724 (800-1)	6020-2½ 844 (900-2½)	6340-3 1164 (1200-3)

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

FAF to MAP 8.2 NM

Knots	60	90	120	150	180
Min:Sec	8:12	5:28	4:06	3:17	2:44

SW-4, 10 JUL 2025 to 07 AUG 2025
SW-4, 10 JUL 2025 to 07 AUG 2025