

WAAS CH <b>82538</b> <b>W35A</b>	APP CRS <b>354°</b>	Rwy Idg TDZE <b>1223</b> Apt Elev <b>1232</b>
--	------------------------	---

RNAV (GPS) RWY 35

GEORGE L SCOTT MUNI (3Y2)

RNP APCH.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV DA to 1524 all Cats and all visibilities ½ mile, LNAV/VNAV DA to 1773 all Cats and all visibilities ½ mile; increase all MDA 60 feet and LNAV Cat C visibility ¼ mile.

MISSED APPROACH:  
Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER <b>118.85</b>	UNICOM <b>122.8 (CTAF) 0</b>
-------------------------------------	---------------------------------

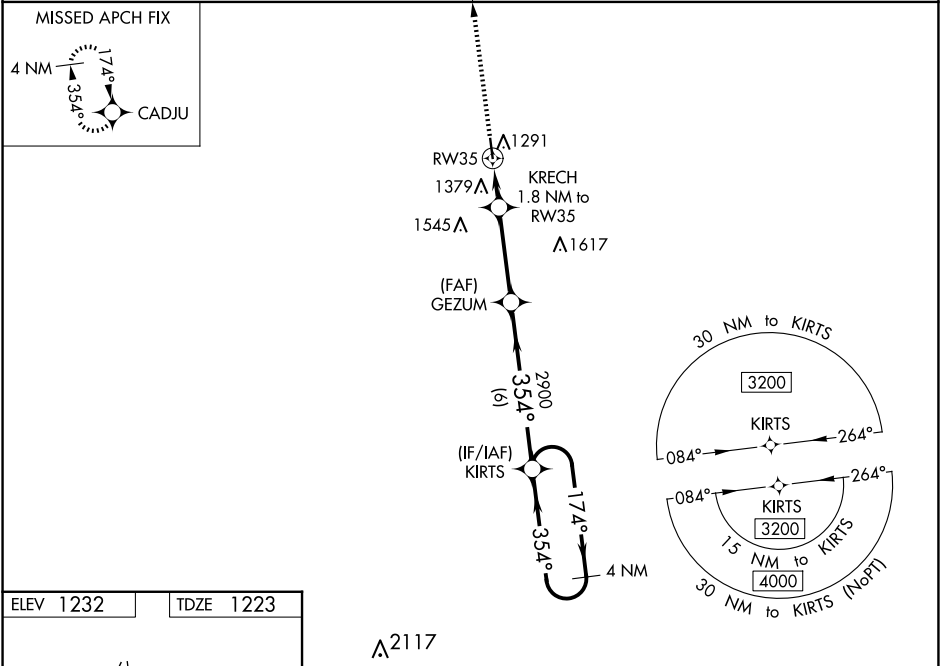

ELEV 1232

TDZE 1223

▲ 2117

3000 CADJU

\* LNAV only

RW35

KRECH 1.8 NM to RW35

GEZUM 2900

KIRTS 2900

4 NM Holding Pattern

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	1473-1	250 (300-1)		NA
LNAV/VNAV DA	1722-1⅞	499 (500-1⅞)		NA
LNAV MDA	1640-1	417 (500-1)	1640-1⅛ 417 (500-1⅛)	NA
CIRCLING	1740-1	508 (600-1)	1860-1¾ 628 (700-1¾)	NA