

APP CRS
162°

Rwy Idg
TDZE
858

Apt Elev
862

RNAV (GPS) RWY 16

INDIANAPOLIS RGNL (MQJ)

RNP APCH - GPS.


▼

⚠

Rwy 16 helicopter visibility reduction below $\frac{3}{4}$ SM NA. VDP NA when using Indianapolis altimeter setting. When local altimeter setting not received, use Indianapolis altimeter setting: increase all MDAs 60 feet and LNAV visibility Cats C and D $\frac{1}{8}$ SM; increase Circling visibility Cat D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2600 direct DOBAC and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF) 0
----------------------------	---	---------------------------	-----------------------------------

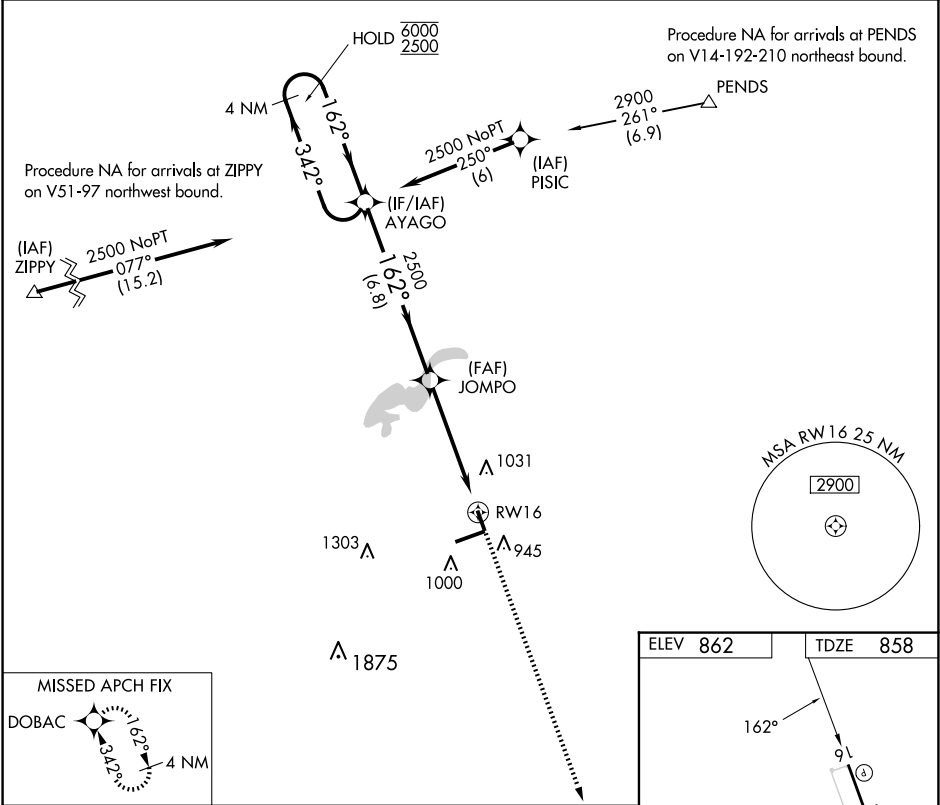

4 NM Holding Pattern		Visual Segment - Obstacles.		2600 ↑	DOBAC ✦
<div><div>6000</div><div>2500</div></div> <div>← 342°</div> <div>162° →</div>		AYAGO	JOMPO	2500	
		6.8 NM		3.8 NM	1.3 NM to RW16
				162°	
					RW16
				1.3	
CATEGORY	A	B	C	D	
LNAV MDA	1320-1	462 (500-1)	1320-1 $\frac{3}{8}$	462 (500-1 $\frac{3}{8}$)	
CIRCLING	1340-1	478 (500-1)	1360-1 $\frac{1}{2}$ 498 (500-1 $\frac{1}{2}$)	1660-2 $\frac{1}{2}$ 798 (800-2 $\frac{1}{2}$)	

