

WAAS CH 97700 W29A	APP CRS 291°	Rwy Ldg TDZE 11 Apt Elev 11	4319
--	------------------------	---	-------------

RNAV (GPS) RWY 29



NEW SMYRNA BEACH MUNI (JACK BOLT FLD) (EVB)

RNP APCH-GPS.

▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. VDP NA when using Daytona Beach altimeter setting. Circling Rwy 7, 11, 25 NA at night. When local altimeter setting not received, use Daytona Beach altimeter setting increase LPV DA to 333 feet and all visibilities ¼ SM. Increase all MDAs 40 feet, LNAV Cat C/D visibility ½ SM, and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct ZALGO and hold.

ATIS 124.625	DAYTONA APP CON 125.35 322.3	NEW SMYRNA BEACH TOWER★ 119.675 (CTAF) 0	GND CON 121.325	UNICOM 122.95
------------------------	--	--	---------------------------	-------------------------

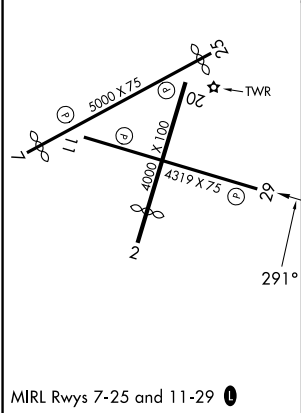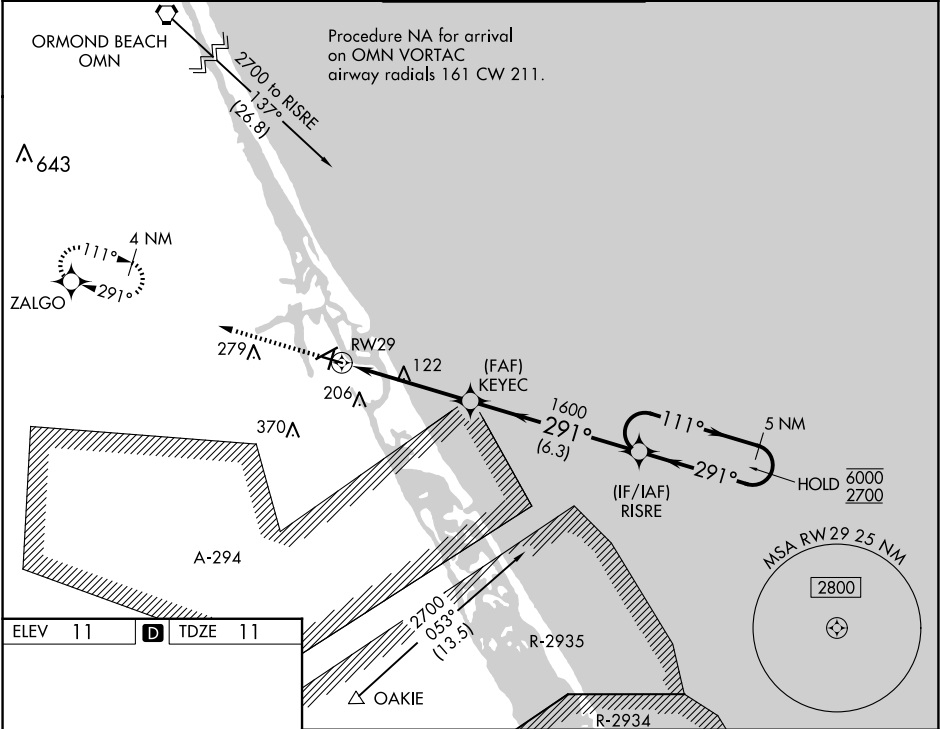

2000 ↑	ZALGO 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).			5 NM Holding Pattern
*LNAV only.		KEYEC 1600	RISRE		
*1.1 NM to RW29		291°		111° → 6000	← 291° 2700
RW29 		1600	GP 3.00° TCH 40		
1.1 NM		3.7 NM	6.3 NM		
CATEGORY	A	B	C	D	
LPV DA	308-7/8		297 (300-7/8)		
LNAV MDA	380-1		369 (400-1)		
CIRCLING	440-1 429 (500-1)	520-1 509 (600-1)	680-1 3/4 669 (700-1 3/4)	680-2 669 (700-2)	