ILS Z or LOC Z RWY 3

JOHNSTON RGNL (JNX)

LOC/DME I-JNX	APP CRS	Rwy Idg	5500
111.15	032°	TDZE	147
Chan 48 (Y)		Apt Elev	164

ADF required. ADF or RADAR required for procedure entry.
DME or RADAR required for LOC only.

T NA VDP NA with Erwin altimeter setting. When local altimeter setting not received, use Erwin altimeter setting: increase DA to 447 feet and all MDAs 60 feet; increase S-LOC 3 Cats C/D and Circling Cat A visibility ¼ SM; JONIR DME fix minimums increase S-LOC 3 Cats C/D visibility ⅛ SM and Circling Cat C visibility ¼ SM. For inop ALS, increase S-LOC 3 Cats C/D visibility to 2½ SM; increase JONIR DME fix minimums Cats C/D visibility to 1¾ SM. For inop ALS when using Erwin altimeter setting, increase S-ILS all Cats visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 1800 direct JN NDB and hold.

AWOS-3	RALEIGH APP CON	GCO	UNICOM
120.225	125.3 353.675	135.075	122.725 (CTAF) L

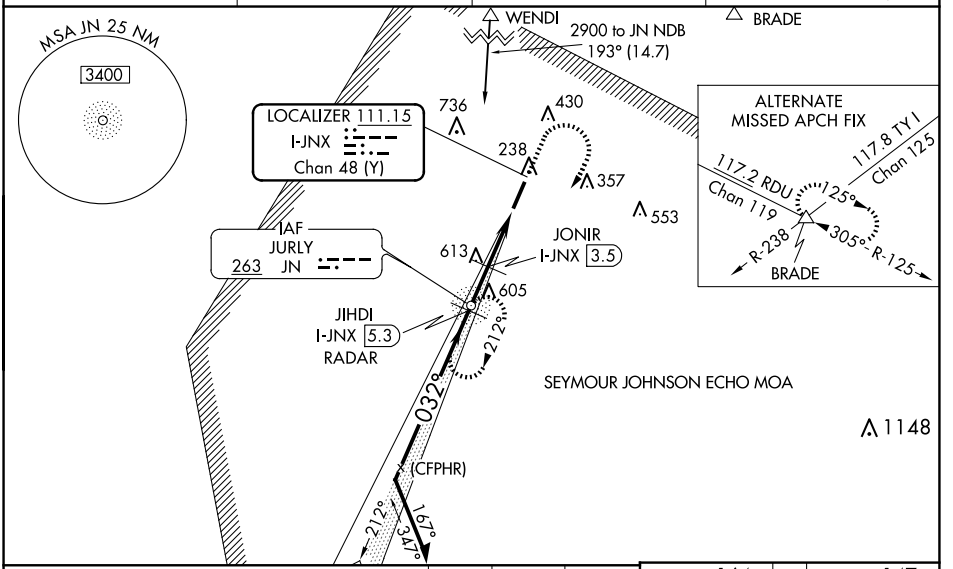

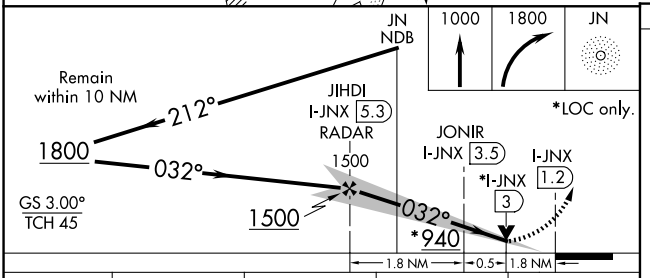

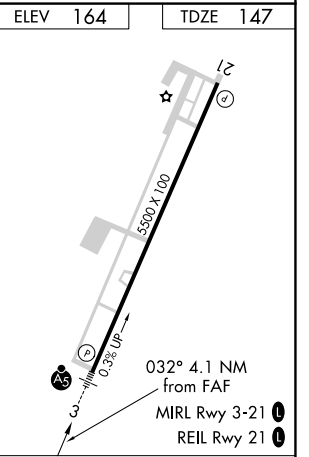

CATEGORY	A	B	C	D
S-ILS 3	397-½ 250 (300-½)			
S-LOC 3	940-½ 793 (800-½)	940-¾ 793 (800-¾)	940-1¾ 793 (800-1¾)	
C CIRCLING	940-1 776 (800-1)	940-1¼ 776 (800-1¼)	940-2½ 776 (800-2½)	1100-3 936 (1000-3)
JONIR DME FIX MINIMUMS				
S-LOC 3	780-½ 633 (700-½)		780-1⅜ 633 (700-1⅜)	
C CIRCLING	780-1 616 (700-1)		920-2¼ 756 (800-2¼)	1100-3 936 (1000-3)

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

SE-2, 10 JUL 2025 to 07 AUG 2025
SE-2, 10 JUL 2025 to 07 AUG 2025