



WAAS CH <b>45520</b> <b>W33A</b>	APP CRS <b>326°</b>	Rwy Idg <b>3999</b> TDZE <b>984</b> Apt Elev <b>984</b>
--	------------------------	---


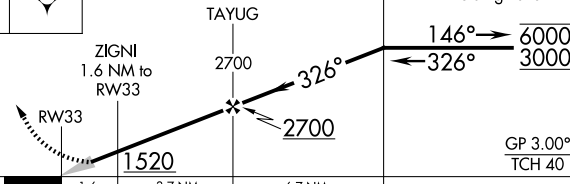

RNAV (GPS) RWY 33

BRENNER FLD (FNB)

RNP APCH - GPS	MISSED APPROACH: Climb to 3000 direct COVUT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV NA when using AFK altimeter setting. When local altimeter not received, use AFK altimeter setting and increase LPV DA to 1338 and LNAV/VNAV DA to 1380, increase all MDAs 120 feet.	

ASOS <b>119.275</b>	ST JOSEPH APP CON ★ <b>120.35 360.8</b>	UNICOM <b>122.8 (CTAF) 1</b>
------------------------	--	---------------------------------

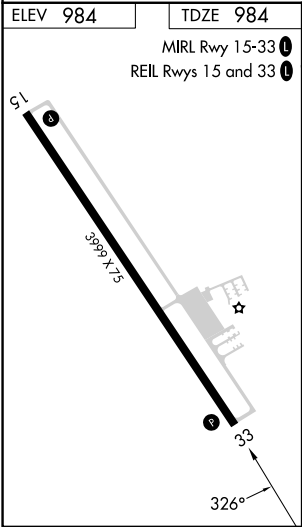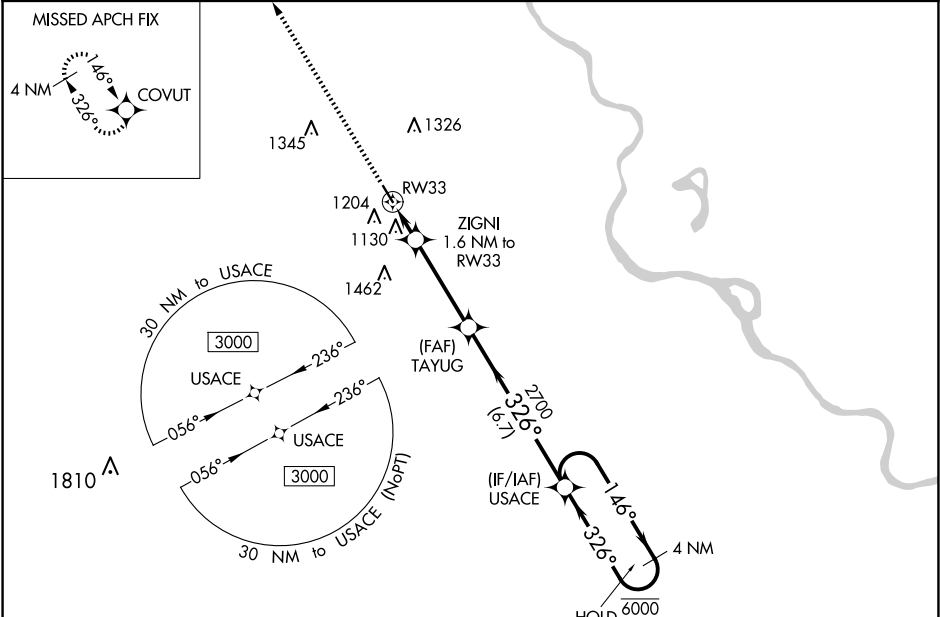

3000 ↑		COVUT 		HOLD 3000	
					
CATEGORY	A	B	C	D	
LPV DA	1234-1	250 (300-1)	NA		
LNAV/VNAV DA	1276-1	292 (300-1)	NA		
LNAV MDA	1380-1	396 (400-1)	NA		
 CIRCLING	1560-1	576 (600-1)	NA		

NC-2, 10 JUL 2025 to 07 AUG 2025

NC-2, 10 JUL 2025 to 07 AUG 2025