# RNAV (GPS) RWY 6

## HENDERSON/OXFORD (HNZ)

| WAAS CH **45709** **W06A** | APP CRS **060°** | Rwy Idg **5501** TDZE **526** Apt Elev **526** |
|---|---|---|

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter setting not received, use Roxboro altimeter setting: increase all DA to 875 feet and all visibilities ⅛ SM; increase all MDA 80 feet and visibility Cats C and D ¼ SM. Baro-VNAV and VDP NA when using Roxboro altimeter setting.
Rwy 6 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct VEKUC and hold.

| AWOS-3 | RALEIGH APP CON | UNICOM |
|---|---|---|
| **118.625** | **132.35 256.9** | **122.8** (CTAF) L |

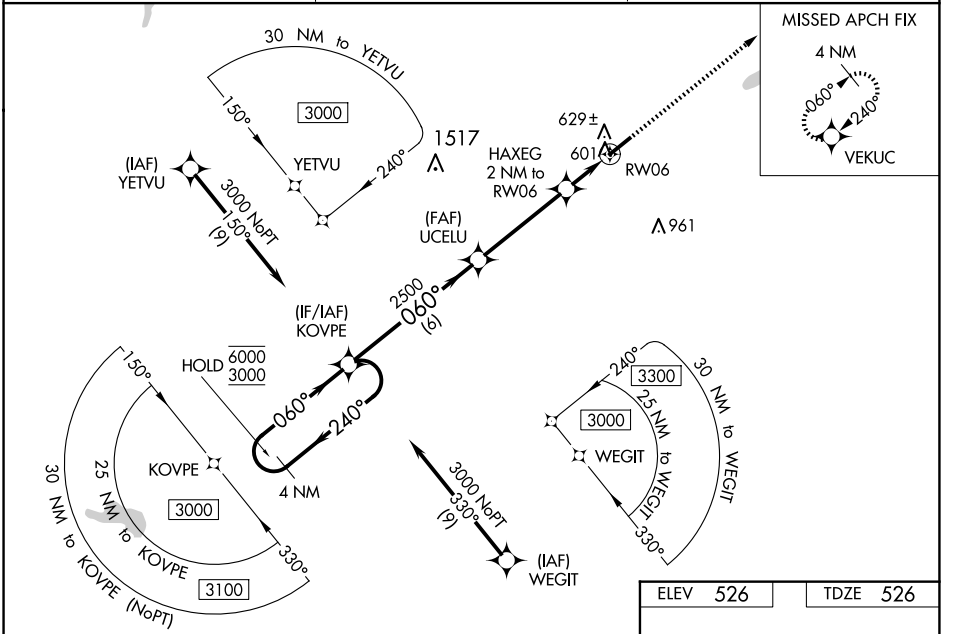


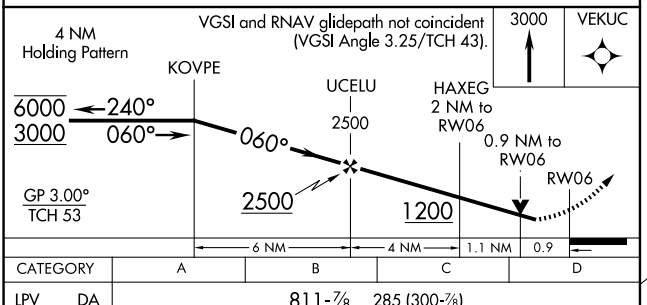


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 811-⅞ 285 (300-⅞) | | | |
| LNAV/VNAV DA | 810-⅞ 284 (300-⅞) | | | |
| LNAV MDA | 880-1 354 (400-1) | | | |
| C CIRCLING | 960-1 434 (500-1) | 980-1 454 (500-1) | 1100-1½ 574 (600-1½) | 1280-2½ 754 (800-2½) |




REIL Rwy 6 L
MIRL Rwy 6-24 L




SE-2, 10 JUL 2025 to 07 AUG 2025