


WAAS CH <b>90117</b> <b>W25A</b>	APP CRS <b>254°</b>	Rwy Idg TDZE Apt Elev	<b>7281</b> <b>1475</b> <b>1478</b>
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

# RNAV (GPS) RWY 25L

PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS	When VGSI inop, Circling to Rwy 25R NA at night. Circling NA north of Rwy 7R-25L at night. When local altimeter setting not received, use Scottsdale altimeter setting; increase LPV all Cats DA to 1877 feet and LPV all Cats visibility ¼ SM. Increase all MDA 40 feet and Circling Cats B visibility ¼ SM. Rwy 25L helicopter visibility reduction below ¾ SM NA. VDP NA when using Scottsdale altimeter setting.	MISSED APPROACH: Climb to 6000 direct BOLES and on track 314° to HEVRO and right turn on track 072° to BANYO and hold.
----------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------

ATIS <b>126.5</b>	PHOENIX APP CON <b>120.7 239.0</b>	DEER VALLEY TOWER ★ <b>118.4</b> (070°-250°) (CTAF) <b>120.2</b> (251°-069°)	GND CON <b>121.8</b>	CLNC DEL <b>123.9</b>	UNICOM <b>122.95</b>
----------------------	---------------------------------------	------------------------------------------------------------------------------------	-------------------------	--------------------------	-------------------------

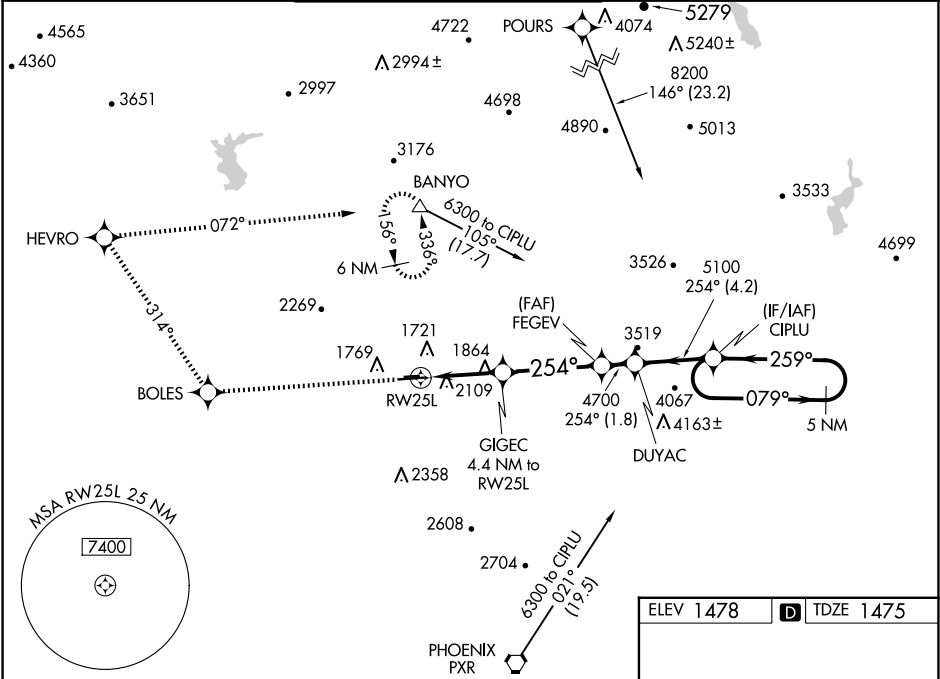

6000	BOLES	tr 314°	HEVRO	tr 072°	BANYO
RW25L 2.6 NM to RW25L 2940 4.4 NM to RW25L 4700 5.3 NM 1.8 NM 4.2 NM					
CATEGORY	A	B	C	D	
LPV DA	1850-1¼ 375 (400-1¼)				
LNNAV MDA	2360-1¼ 885 (900-1¼)	2360-2¾ 885 (900-2¾)	2360-3 885 (900-3)		
CIRCLING	2400-1¼ 922 (1000-1¼)	2420-1¼ 942 (1000-1¼)	2580-3 1102 (1200-3)	2700-3 1222 (1300-3)	

