WAAS CH **87108** **W18A** | APP CRS **181°** | Rwy Idg **5001** TDZE **684** Apt Elev **685**

RNAV (GPS) RWY 18

STARKE COUNTY (OXI)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using SBN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA to Rwys 9 and 27. When local altimeter setting not received, use SBN altimeter setting: increase LPV DA to 1010 feet; increase LNAV/VNAV DA to 1136 feet and all visibilities ⅜ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ⅜ SM, and Circling visibility Cat C and D ¼ SM.

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct SELOE and hold.

AWOS-3	SOUTH BEND APP CON ★	UNICOM
135.775	132.05 257.8	122.8 (CTAF) L

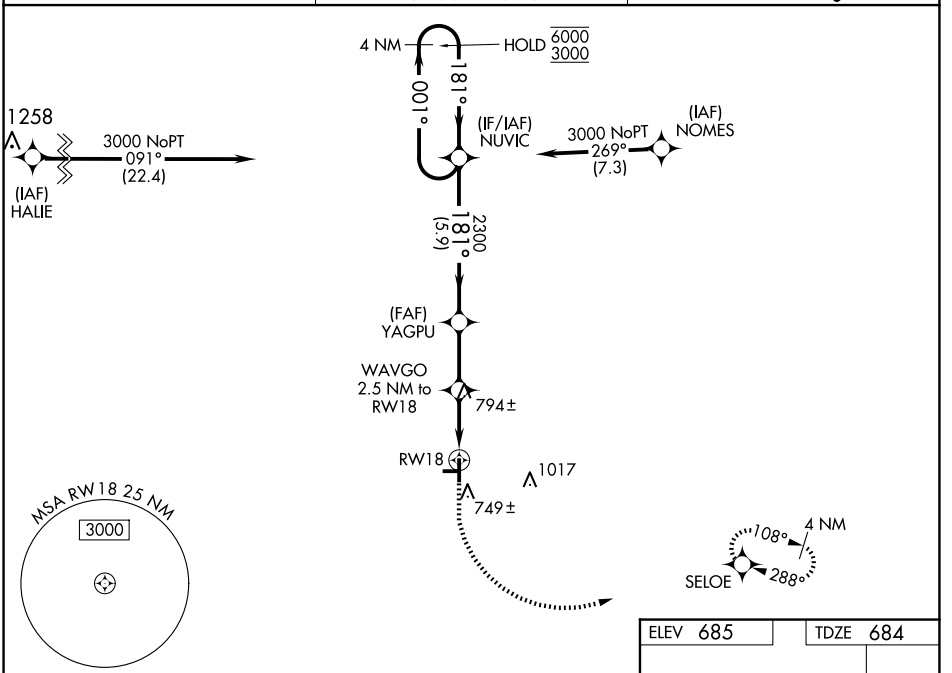

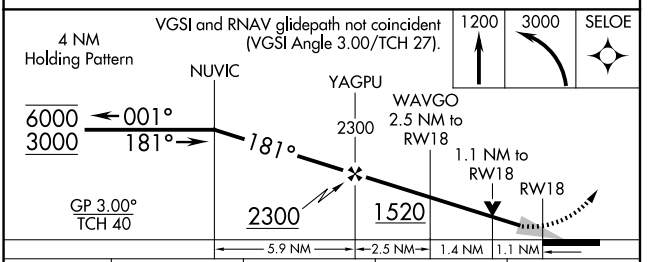

CATEGORY	A	B	C	D
LPV DA	934-1	250 (300-1)		
LNAV/VNAV DA	1060-1	376 (400-1)		
LNAV MDA	1060-1	376 (400-1)		
CIRCLING	1120-1 435 (500-1)	1140-1 455 (500-1)	1380-2 695 (700-2)	1380-2¼ 695 (700-2¼)

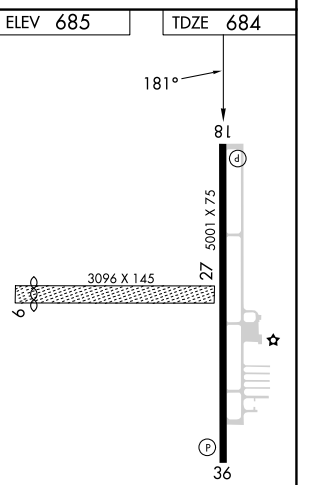

MIRL Rwy 18-36
REIL Rwys 18 and 36 L

EC-2, 10 JUL 2025 to 07 AUG 2025
EC-2, 10 JUL 2025 to 07 AUG 2025