WAAS CH 82541 W16B	APP CRS 166°	Rwy Ldg 10600 TDZE 723 Apt Elev 723

RNAV (GPS) RWY 16L

PEROT FLD/FORT WORTH ALLIANCE (AFW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA east of Rwy 16L-34R. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct OBLON and hold.

ATIS	LONE STAR APP CON	ALLIANCE TOWER	GND CON	CLNC DEL
126.925	118.1 306.95	135.15 257.9	132.65 306.2	128.725

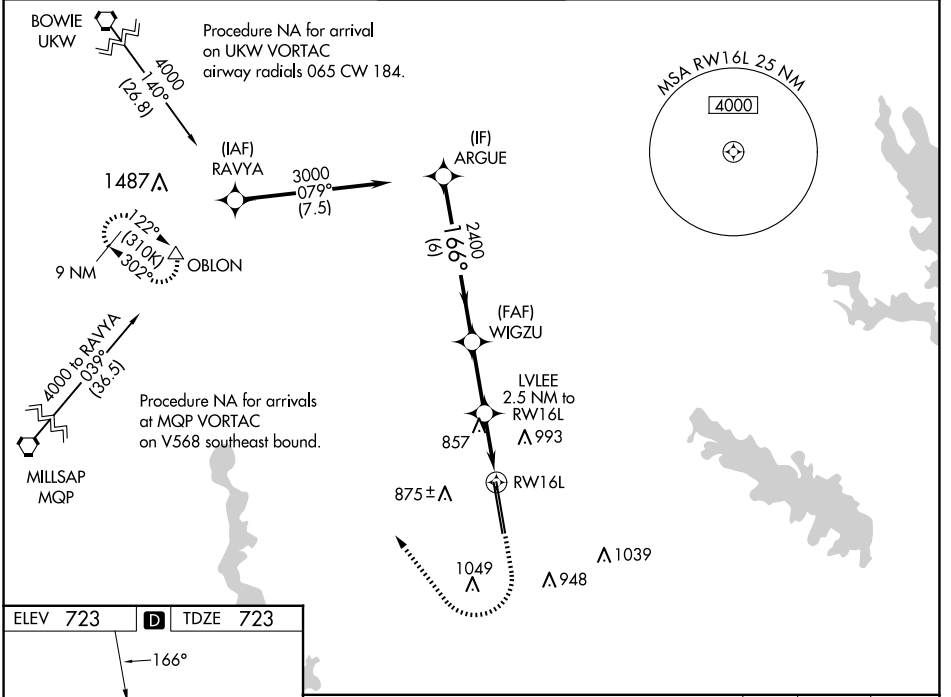

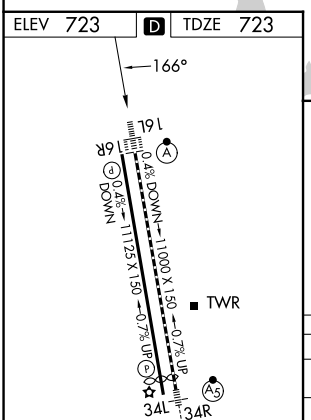

TDZ/CL Rwys 16L and 34R
HIRL Rwys 16L-34R and 16R-34L
REIL Rwys 16R and 34L

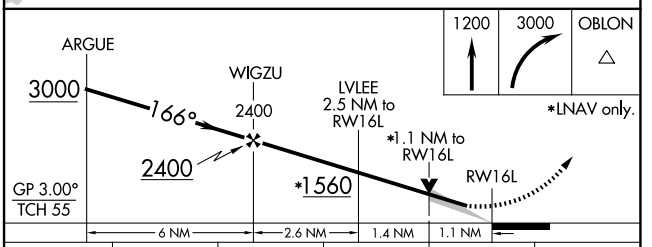

CATEGORY	A	B	C	D	E
LPV DA	923/18 200 (200-½)				
LNAV/VNAV DA	1016/24 293 (300-½)				
LNAV MDA	1120/24 397 (400-½)		1120/35 397 (400-⅝)		
C CIRCLING	1160-1 437 (500-1)	1320-1 597 (600-1)	1360-1¾ 637 (700-1¾)	1380-2 657 (700-2)	1380-2¼ 657 (700-2¼)

SC-2, 10 JUL 2025 to 07 AUG 2025
SC-2, 10 JUL 2025 to 07 AUG 2025