WAAS	APP CRS	Rwy Ldg	6101
CH 49016	346°	TDZE	5012
W34A		Apt Elev	5024

RNAV (GPS) RWY 34

MC CALL MUNI (MYL)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 40°C. When local altimeter setting not received, procedure NA. Rwy 34 helicopter visibility reduction below ¾ SM NA. Circling Rwy 16 NA at night.

-19°C

MISSED APPROACH: Climb to 5600, then climbing left turn to 12000 direct WADPO and on track 243° to SUMOQ and hold, continue climb-in-hold to 12000.
*Missed approach requires minimum climb of 265 feet per NM to 6380.

ASOS	SALT LAKE CENTER	UNICOM
119.925	128.05 306.95	122.8 (CTAF) L

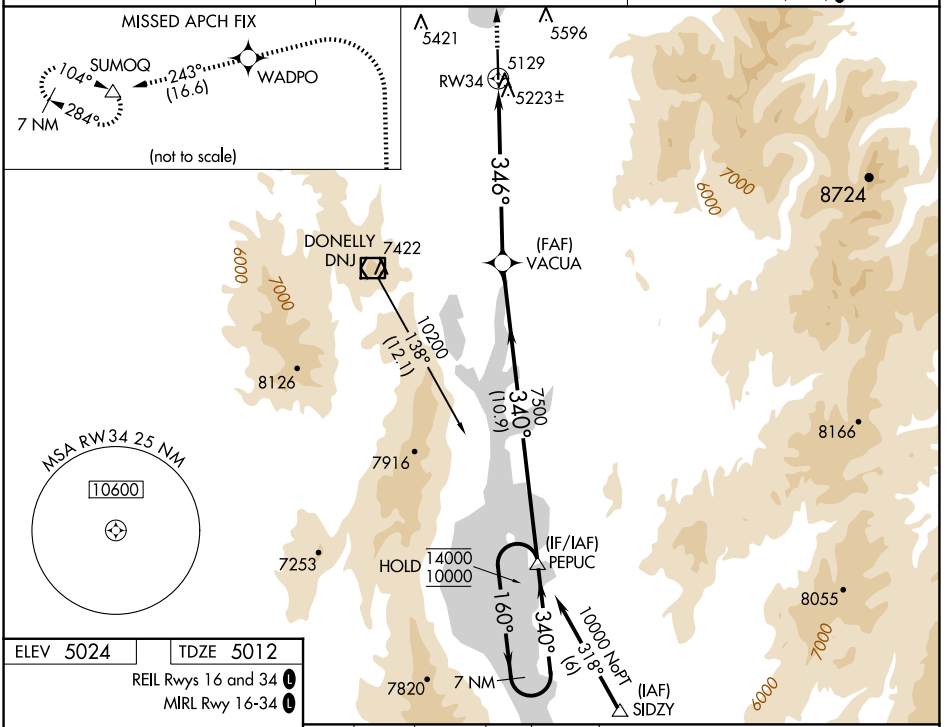

ELEV 5024	TDZE 5012

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

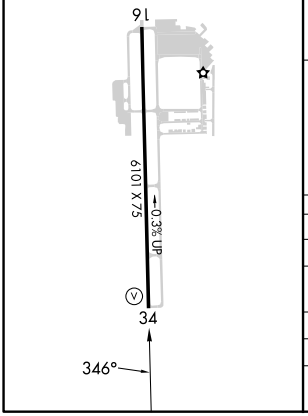

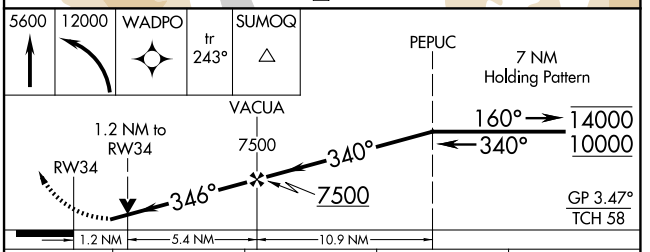

CATEGORY	A	B	C	D
LPV DA	5375-1 363 (400-1)			
LNAV/VNAV DA	5683-1⅞ 671 (700-1⅞)			
LNAV MDA*	5520-1 508 (500-1)		5520-1⅜ 508 (500-1⅜)	
LNAV MDA	5680-1 668 (700-1)		5680-1⅞ 668 (700-1⅞)	
C CIRCLING	5700-1 676 (700-1)	5920-1¼ 896 (900-1¼)	6140-3 1116 (1200-3)	6660-3 1636 (1700-3)

NW-1, 10 JUL 2025 to 07 AUG 2025
NW-1, 10 JUL 2025 to 07 AUG 2025