

WAAS CH 69419 W13A	APP CRS 136°	Rwy Idg TDZE 1140 Apt Elev 1140
--	------------------------	---

RNAV (GPS) RWY 13

LITCHFIELD MUNI (LJF)

RNP APCH - GPS.

▼


Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54° C. Visibility reduction by helicopters

▲

NA. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1436 feet; increase LNAV/VNAV DA to 1980 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.

MISSED APPROACH:
Climb to 2800 direct
ANIML and hold.

AWOS-3 119.65	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9 0
-------------------------	--	------------------------

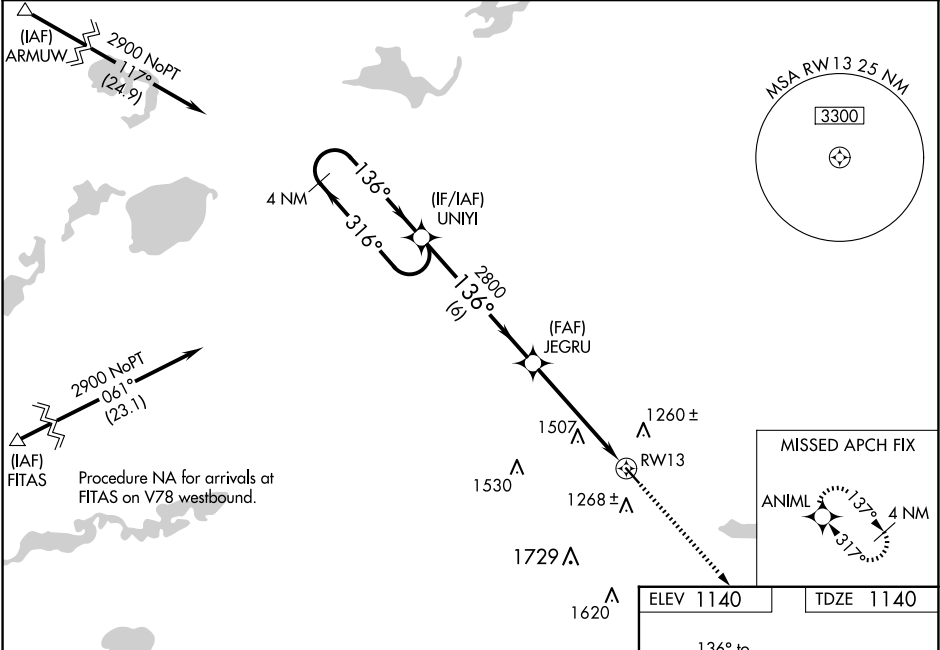

4 NM Holding Pattern		UNYI		JEGRU		2800		ANIML	
2900		316°		136°		2800		*LNAV only	
GP 3.00° TCH 39				2800		*2 NM to RW13		RW13	
		6 NM		3 NM		2 NM			
CATEGORY	A	B	C	D					
LPV DA	1390-1		250 (300-1)						
LNAV/VNAV DA	1934-2¾		794 (800-2¾)						
LNAV MDA	1820-1	680 (700-1)	1820-2	680 (700-2)	1820-2¼	680 (700-2¼)			
CIRCLING	1820-1	680 (700-1)	1860-2	720 (800-2)	2080-3	940 (1000-3)			

ELEV 1140 TDZE 1140

136° to RW13

402 X 100

REIL Rwy 13 and 31

MIRL Rwy 13-31