



WAAS CH <b>53614</b> <b>W30A</b>	APP CRS <b>303°</b>	Rwy Idg <b>4105</b> TDZE <b>1147</b> Apt Elev <b>1147</b>
--	------------------------	---

RNAV (GPS) RWY 30

HAROLD DAVIDSON FLD (VMR)

RNP APCH.		MISSED APPROACH: Climb to 3500 direct WAPIR and hold.
NA	Baro-VNAV NA. Use Yankton altimeter setting.	

AWOS-3P <b>118.65</b>	YKN AWOS-3PT <b>119.05</b>	SIOUX CITY APP CON★ <b>124.6 307.0</b>	AUNICOM <b>122.8 (CTAF)</b> 0
--------------------------	-------------------------------	---	----------------------------------

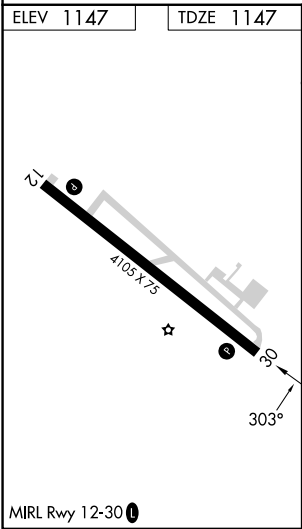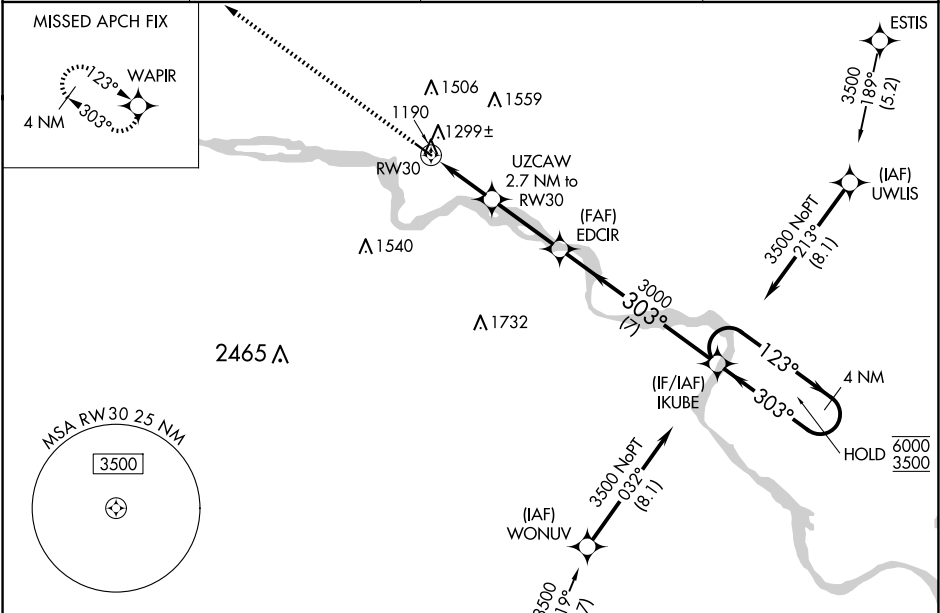

3500 WAPIR		UZCAW 2.7 NM to RW30		EDCIR 3000	IKUBE 4 NM Holding Pattern
* LNAV only		2040*		3000	123° → 6000 ← 303° 3500
RW30		2.7 NM		3 NM	7 NM
CATEGORY	A	B	C	D	
LPV DA	1470-1 323 (400-1)				NA
LNAV/VNAV DA	1487-1 340 (400-1)				NA
LNAV MDA	1580-1	433 (500-1)	1580-1¼ 433 (500-1¼)	NA	
CIRCLING	1760-1	613 (700-1)	1900-2¼ 753 (800-2¼)	NA	