

WAAS CH 97540 W24A	APP CRS 238°	Rwy Idg 3396 TDZE 575 Apt Elev 575
--	------------------------	---


RNAV (GPS) RWY 24
PAGELAND (PYG)

PAGELAND (PYG)

T Baro-VNAV NA. Rwy 24 helicopter visibility reduction below $\frac{3}{4}$ SM NA. DME/DME
A **NA** RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe
Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase
LPV DA to 944 feet and all visibilities $\frac{1}{4}$ SM. Increase LNAV/VNAV DA to 986 feet
and all visibilities $\frac{1}{8}$ SM. Increase all MDA 60 feet.

MISSED APPROACH:
Climb to 2400 direct
WITHE and hold.

EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
----------------------------	--	------------------------

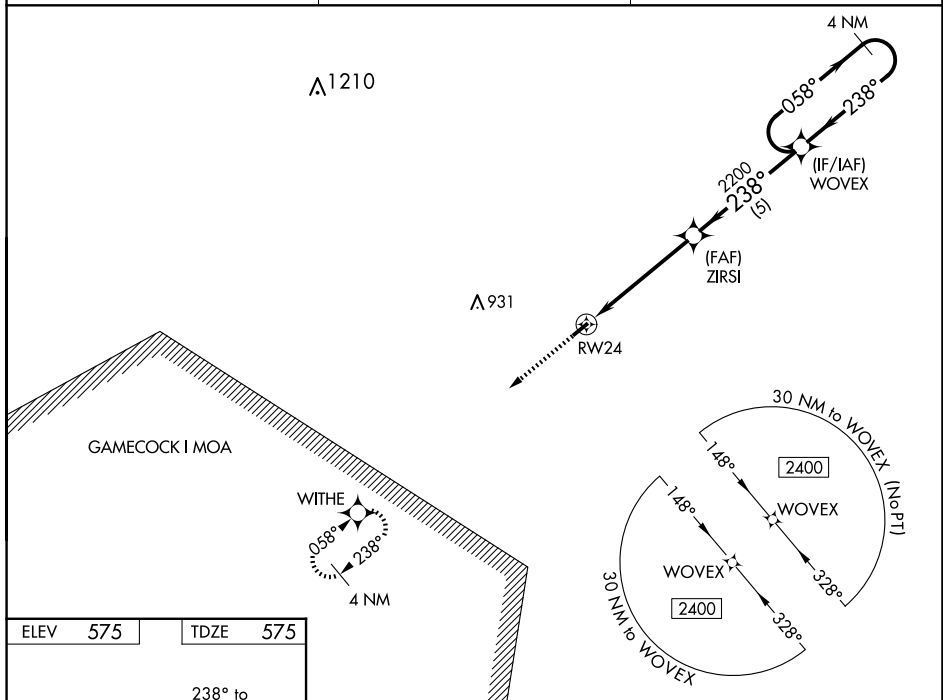

MIRL Rwy 6-24
REIL Rwy 6 and 24